


CSFF201 Series

A cross-sectional view of a bolted joint. A horizontal plate is shown with two vertical bolts passing through it. The bolts are secured by split pins (cotter pins) that are inserted into the ends of the bolts and the plate. The split pins are shown in a cross-section, with one end of each pin passing through the bolt and the other end passing through the plate. The bolts are shown in a cross-section, with the split pins passing through the ends of the bolts and the plate.

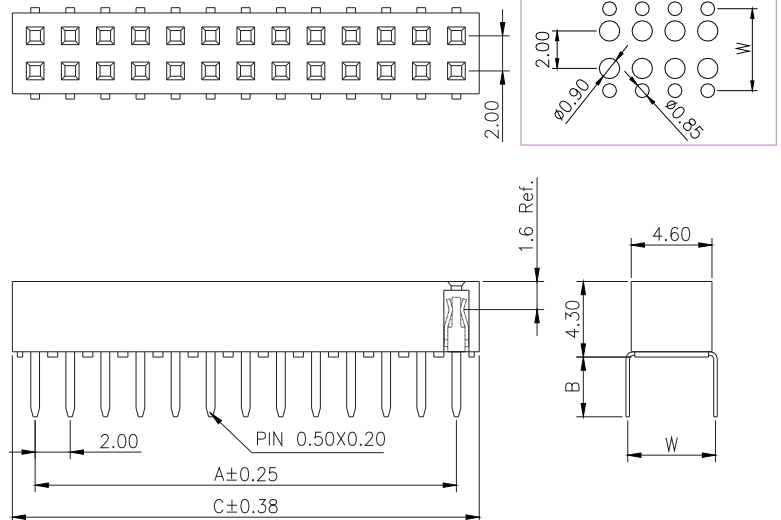

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C			A	C			A	C			A	C	
01 02 03 04 05 06 07 08 09 10				11	20.00	22.60		21	40.00	42.60		31	60.00	62.60	
	2.00	4.60		12	22.00	24.60		22	42.00	44.60		32	62.00	64.60	
	4.00	6.60		13	24.00	26.60		23	44.00	46.60		33	64.00	66.60	
	6.00	8.60		14	26.00	28.60		24	46.00	48.60		34	66.00	68.60	
	8.00	10.60		15	28.00	30.60		25	48.00	50.60		35	68.00	70.60	
	10.00	12.60		16	30.00	32.60		26	50.00	52.60		36	70.00	72.60	
	12.00	14.60		17	32.00	34.60		27	52.00	54.60		37	72.00	74.60	
	14.00	16.60		18	34.00	36.60		28	54.00	56.60		38	74.00	76.60	
	16.00	18.60		19	36.00	38.60		29	56.00	58.60		39	76.00	78.60	
	18.00	20.60		20	38.00	40.60		30	58.00	60.60		40	78.00	80.60	

48