

Female Header

pitch 2.54mm (0.1") | Dual row | Dip

CSHF211 Series


Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection.

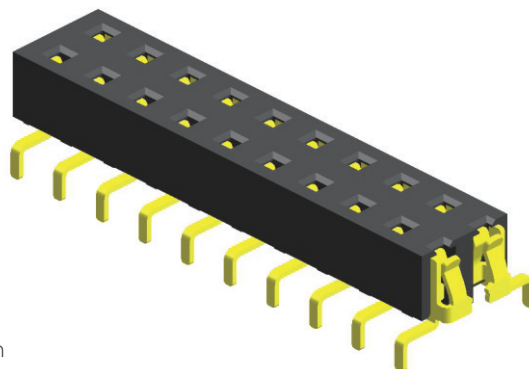



Mating with



M01

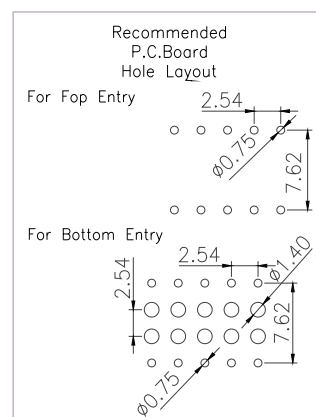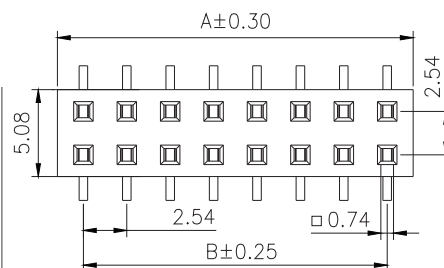

P.S. : Suggested mating pin length : 2.5 ~ 3.0 mm

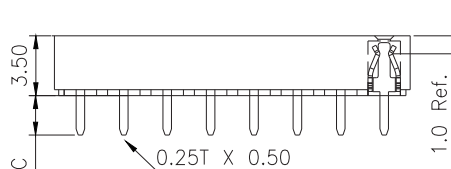

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	5.58	2.54	11	28.44	25.40	21	53.84	50.80	31	79.24	76.20
03	8.12	5.08	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
04	10.66	7.62	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
05	13.20	10.16	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
06	15.74	12.70	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
07	18.28	15.24	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
08	20.82	17.78	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
09	23.36	20.32	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
10	25.90	22.86	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
			20	51.30	48.26	30	76.70	73.66	40	102.10	99.06

Ordering Information

CSHF2

Height Option (H)

-

No. of Pins per Row

↓

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

R1AC

Pin Length (C)

: C=2.30

For special length requirement
Please contact our sales personnel