


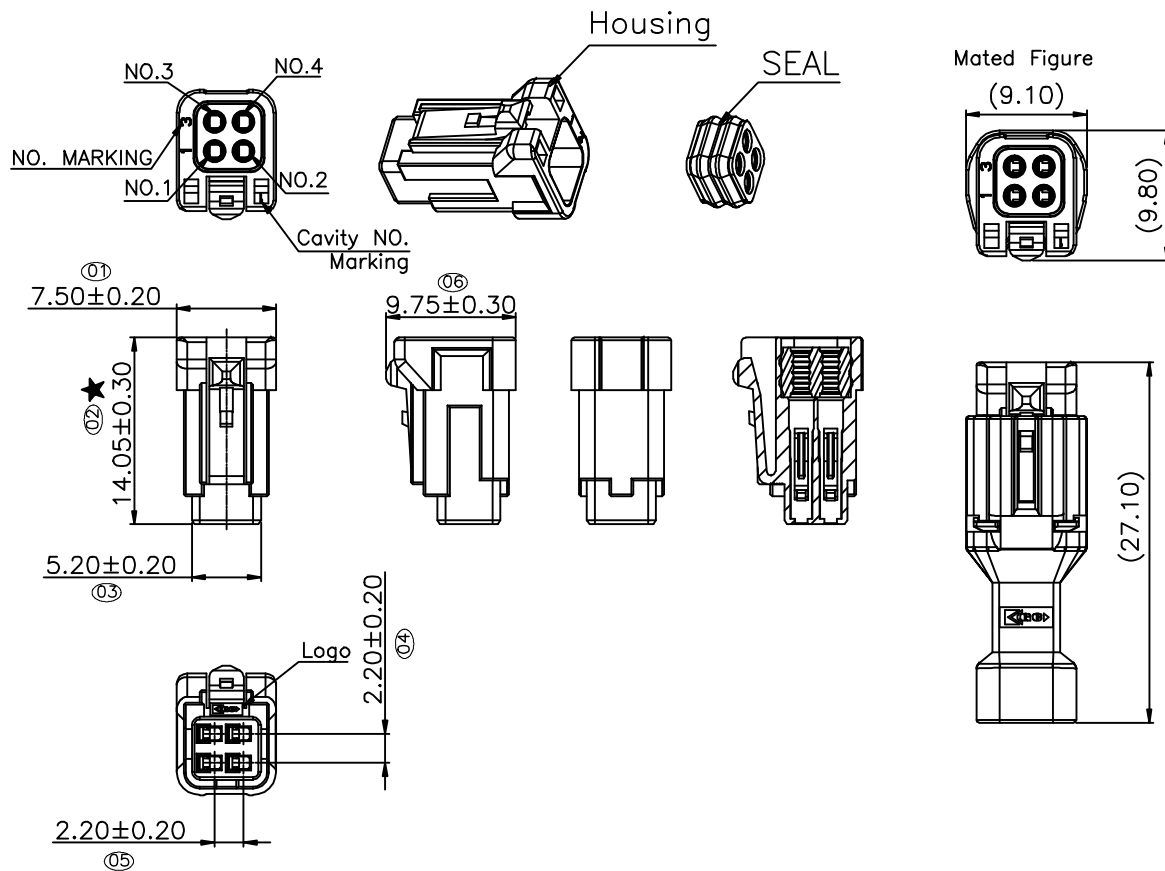

Specifications

Current Rating 20 AWG: 3.5Amp/PIN Δ
 22 AWG: 3.0Amp/PIN
 24 AWG: 2.0Amp/PIN
 26 AWG: 1.0Amp/PIN

Voltage Rating: 250V AC/DC.
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 650VAC
 Contact Resistance: 30m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials
 Insulator Material: Temperature
 Thermoplastic, UL 94V-0 PBT
 or the equivalent material

★ All materials must meet Greenconn hazardous substances control standards.
 ★★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ★★: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government



REV. D UNIT. mm SCALE. 3:2

3RD.ANG
 PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X.' $\pm$ 3.0'	X. $\pm$ 0.30
.X' $\pm$ 2.0'	.X $\pm$ 0.25
.XX' $\pm$ 1.0'	.XX $\pm$ 0.20
.XXX' $\pm$ 0.5'	.XXX $\pm$ 0.15

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 AGZ172-HA-N
 PART NO.
 AGZ172-02AAT-N

TITLE.
 2.2Pitch 4Pin SEAL Series
 Female Ass'y