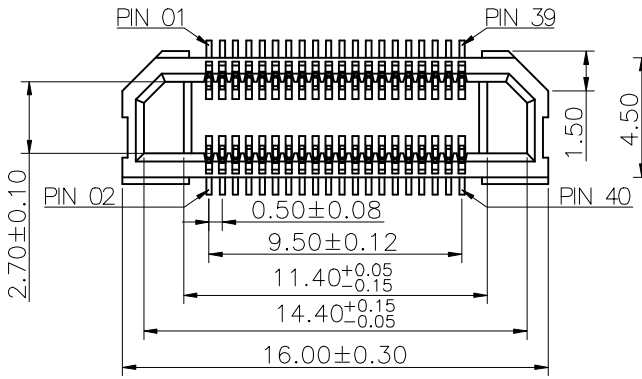

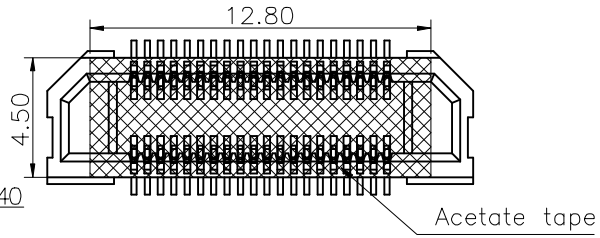

Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:30mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

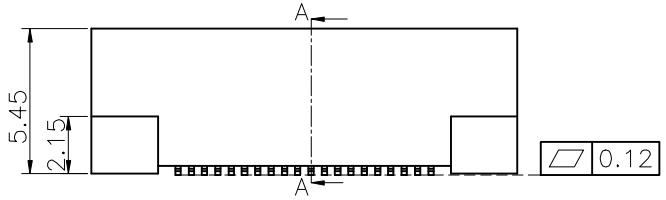





SECTION A−A

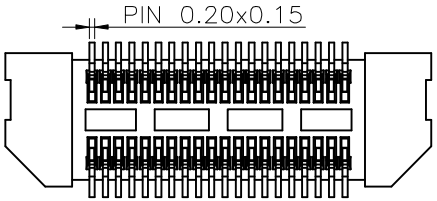

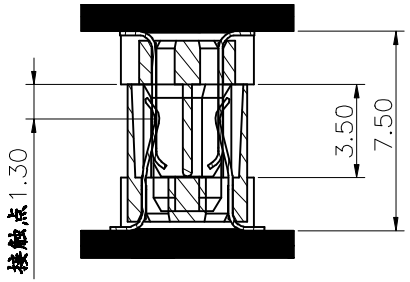

Recommended P.C.Board Layout
(Tolerance:±0.05)

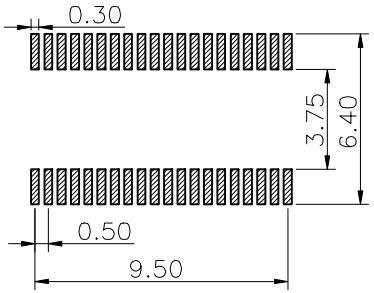

Ordering Information

C BAC230 − XX XX A 001 C 1 T X

- XX: No. of Pins per Row — 20
- XX: Standard Plating — 02=Gold Flash; Selective Plating — 01=Tin
- 1: Color — 1=Black
- X: Standard Packing — D=Tape&Reel; Selective Packing — H=Acetate tape+T&R

Greenconn Website:www.greenconn.com E−mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CBAC230−CA1CT	TITLE. 0.50 B TO B FEMALE DUAL ROWS SMT TYPE CONNECTOR
		X.°±5.0°	X.±0.30				
		.X°±3.0°	.X±0.25	CHECKED:	DATE:	PART NO. CBAC230−20XX A001C1TX	
		.XX°±2.0°	.XX±0.15				
REV. 01 / UNIT. mm / SCALE. 4:1	PAGE. 1/1	.XXX°±1.0°	.XXX±0.10	APPROVED:	DATE:		