

1 2 3 4 5 6 7 8 9

F




E

D


C

B

A

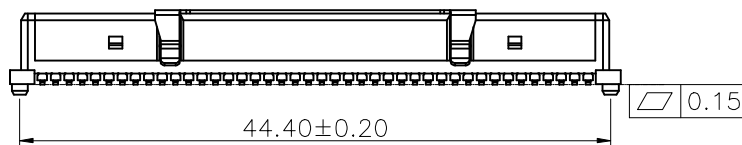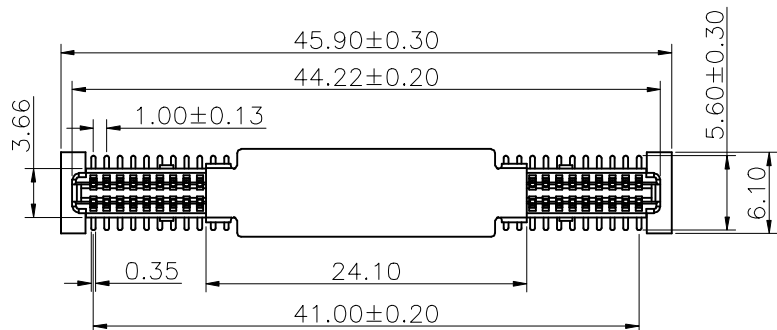

Recommended P.C.Board
Layout
(Tolerance:±0.05)

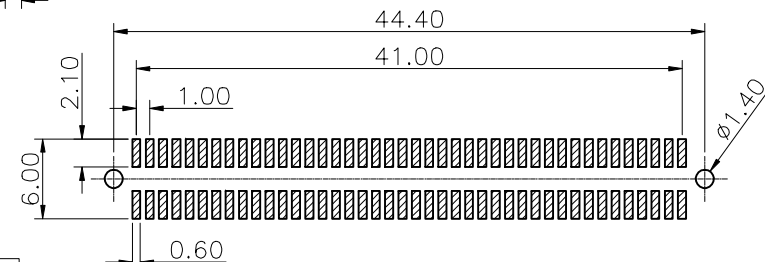

Ordering Information

CBCC210 - 42 XX B XXX C 2 A X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
42

Positioning column information
A=No locating post
B=Round post
C=Square post

Pin length
See the drawing

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Insulator Material
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
C=Tube
D=Tape&Reel
E=Cap + Tube
F=Cap+Tape&Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X: ±5.0'	X: ±0.30
.X: ±3.0'	.X: ±0.25
.XX: ±2.0'	.XX: ±0.15
.XXX: ±1.0'	.XXX: ±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO. SIGEND:	DATE:
APPROVED:	DATE:

DWG. NO. CBCC210-CBXX
PART NO. CBCC210-42XX BXXX C2AX

TITLE.
1.0mm PITCH
BOARD TO BOARD FEMALE
S.M.T TYPE

REV. 01	UNIT. mm	SCALE. 2:1	PAGE. 1/1
---------	----------	------------	-----------

1 2 3 4 5 6 7 8 9