



1 2 3 4 5 6 7 8 9


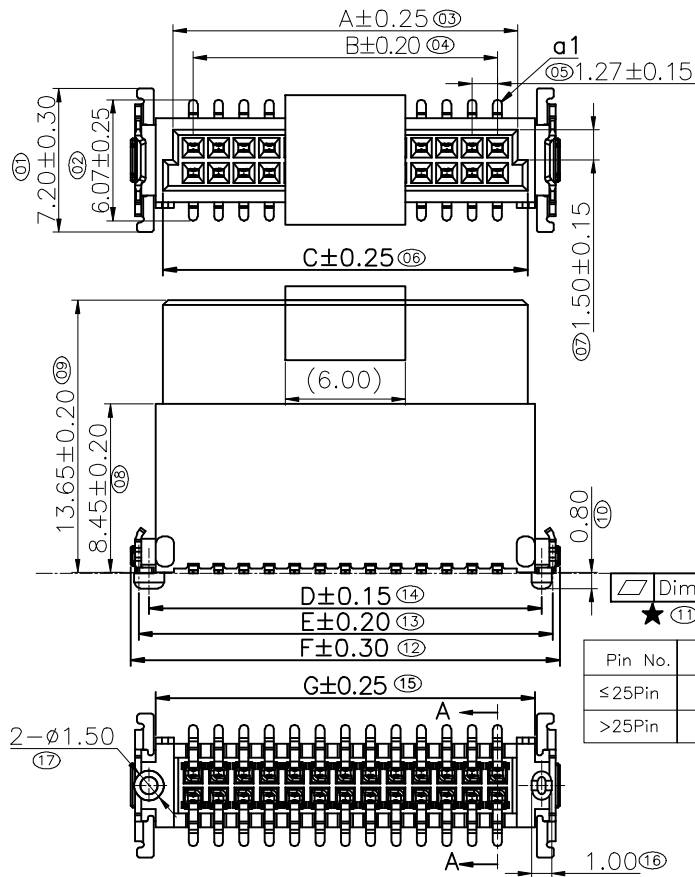


No. of PIN/ROW	Dimension Information						
	A	B	C	D	E	F	G
2x06	8.37	6.35	9.37	10.77	11.87	12.60	10.10
2x08	10.91	8.89	11.91	13.31	14.41	15.14	12.64
2x10	13.45	11.43	14.45	15.85	16.95	17.68	15.18
2x13	17.26	15.24	18.26	19.66	20.76	21.49	18.99
2x16	21.07	19.05	22.07	23.47	24.57	25.30	22.80
2x20	26.15	24.13	27.15	28.55	29.65	30.38	27.88
2x23	29.96	27.94	30.96	32.36	33.46	34.19	31.69
2x25	32.50	30.48	33.50	34.90	36.00	36.73	34.23
2x34	43.93	41.91	44.93	46.33	47.43	48.16	45.66
2x40	51.55	49.53	52.55	53.95	55.05	55.78	53.28

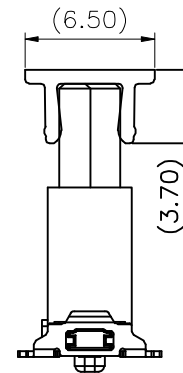


Pin No.	Dim.H
≤25Pin	0.12
>25Pin	0.15

(18) 3.05±0.20
(19) 1.27±0.20
AT THE BOTTOM



SEC:A-A
1:1

Recommended P.C.Board Layout
(Tolerance:±0.05)

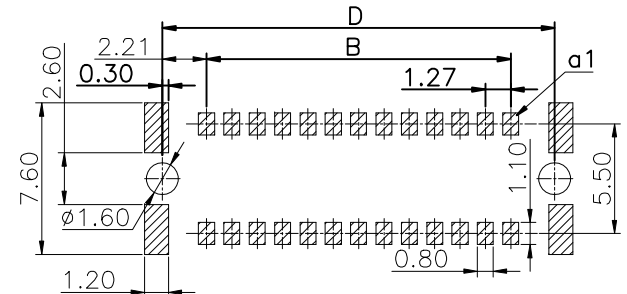

Ordering Information

C BEC224- XX XX B 001 C 1

No. of Pins per Row
06,08,10,13,16,
20,23,25,34,40

Standard Plating
79=5u"Au/80~160u"Matte Tin
05=1u"Au/80~160u"Matte Tin
Selective Plating
02=Gold Flash

Color
1=Black


Standard Packing
F=Cap+Tape&Reel
Selective Packing
C=Tube
E=Cap+Tube



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 3:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

CBEC224-CB001

PART NO.

CBEC224-XXXXB001C1AX

TITLE.

1.27 BOARD TO BOARD
FEMALE DUAL ROW SMT
TYPE CONNECTOR

1 2 3 4 5 6 7 8 9