
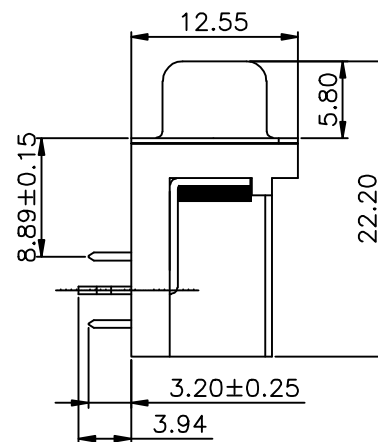
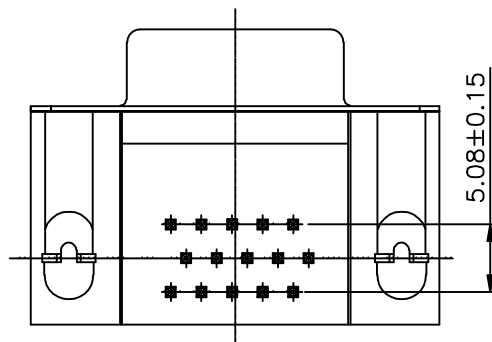


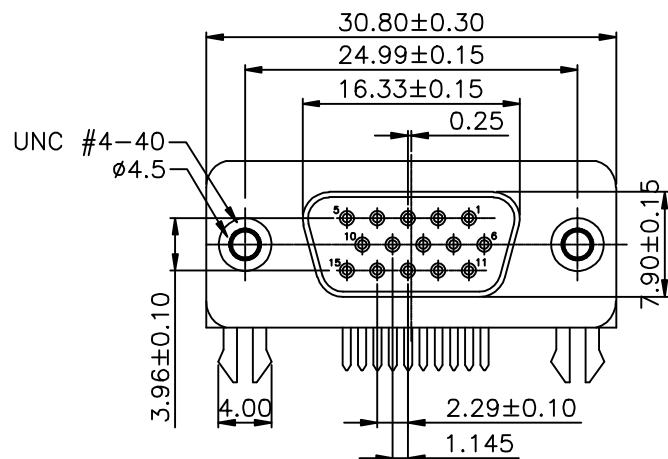

Ordering Information

C DZB303 - 15

No. of Pins per Row
15

XX

Standard Plating
02-Gold Flash
Selective plating
01-Tin
05-Gold Flash/Tin

A004

A

Color
1-Black

1

A

Standard Packing
A-Box
Selective Packing
C-Tube
D-Tape & Reel

X


Notes:

1.Materials:

Housing: Polyester,UL 94V-0.
PBT Or Equivalent material.
Cover: Polyester,UL 94V-0.
PBT Or Equivalent material.
Contact: Phosphor Bronze.
Shell: Spcc.
Boardlock:Copper Alloy/Under plating Ni(50~200μ"),
Over plating Sn (80~200μ").
Screw: Copper Alloy.

2.Electrical:

Current Rating: 3Amp AC/DC
Insulation Resistance: 1000 MΩ Min.
Voltage rating: 300V AC/DC
Contact Resistance: 20mΩ Max.
Temperature rating:-25°C to +105°C
All materials must meet Greenconn
requirement for environment protection.

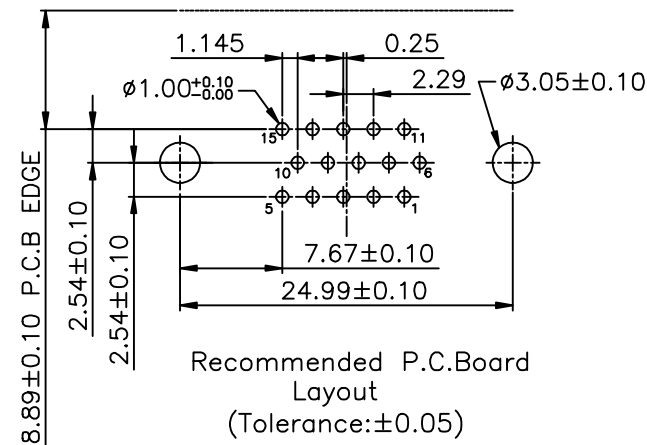

格稜股份有限公司
Greenconn Corporation

REV. 10 UNIT. mm SCALE. 2:1 PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

CO SIGNED:

DATE:

APPROVED:

DATE:

DWG. NO.

CDZB303-CA4AA

PART NO.

CDZB303-15XX A004A1AX

TITLE.

D-SUB 0.35" SERIES
FEMALE