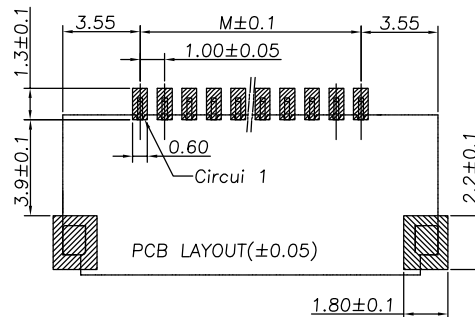
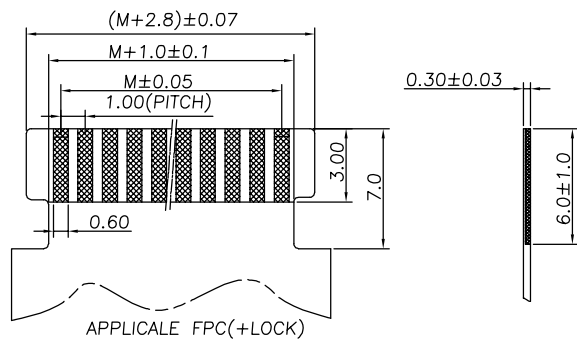
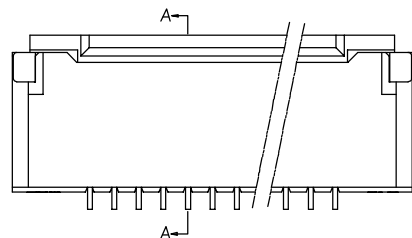
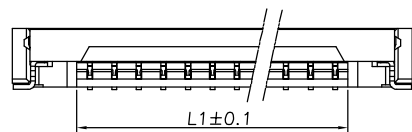
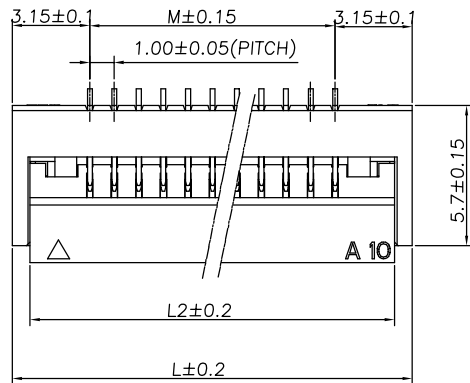


Specifications
Current Rating;1.0AMPS
Volatge Rating:50V AC DC
Dielectric Withstanding Volatge:
500VAC/Minute
Contact Resistance:30mΩ Max.
Insulation Resistance:500MΩ Min.
Operating Temperature:-40°C to +85°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP(Nylon) or
the equivalent material
All materials must meet GREENCONN
hazardous substances control standards.

No. of PINS	Dimension Information			
	M	L1	L	L2
6	5.0	6.1	11.3	9.9
8	7.0	8.1	13.3	11.9
10	9.0	10.1	15.3	13.9
12	11.0	12.1	17.3	15.9
15	14.0	15.1	20.3	18.9
18	17.0	18.1	23.3	21.9
20	19.0	20.1	25.3	23.9
30	29.0	30.1	35.3	33.9

Ordering Information

C FCD158 - XX

XX

A 001

C

X

S

X

No. of Pins per Row
SEE TABLE

Standard Plating
02=Gold Flash
09=Gold 3u"

Color
2=White

Standard Packing
D=Tape&Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.*±3.0°	X.±
.X*±1.0°	.X±0.25
.XX*±	.XX±0.12
.XXX*±	.XXX±0.05

DESIGNED:

DATE:

DWG. NO.

CFCD158-CA1CS

TITLE.

1.0 FPC CONN ZIF SMT
FRONTFLIP H=2.4 DOUBLE
LOWER CONTACT

CHECKED:

DATE:

PART NO.

CFCD158-XXXXA001CXSX

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1