



1 2 3 4 5 6 7 8 9

F

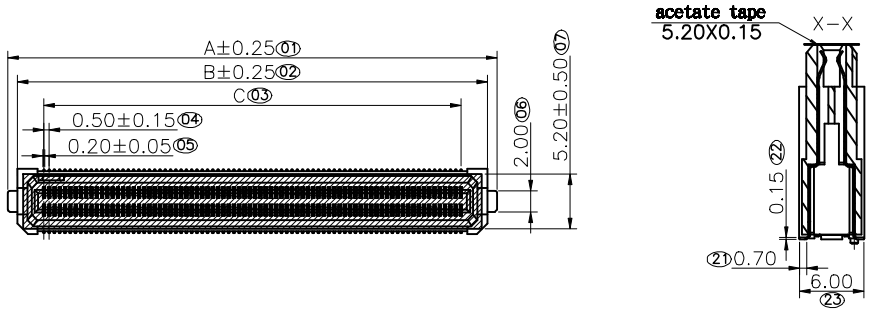

E

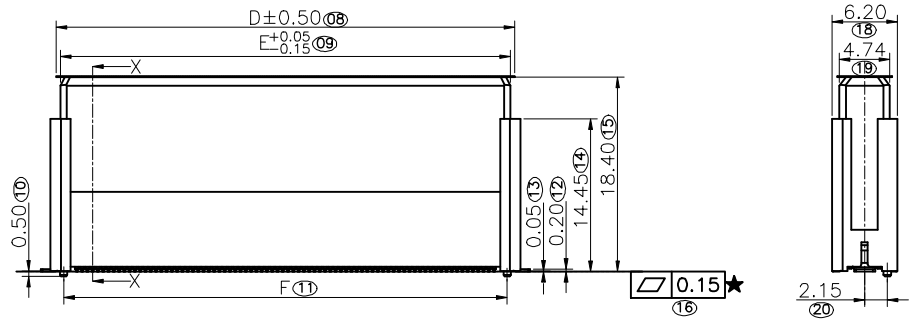

D

C



Ordering Information


B

C GAC201 - XX XX B 001 C 1 9 X

No. Of Pins Per Row 15/20/30/40/50/60/70/80
Standard Plating 02=Gold Flash
Color 1=Black
Standard Packing H=Acetate tape+Tape&Reel

Specifications
Current Rating:0.4Amp
Insulation Resistance:100MΩMin.
Dielectric Withstanding Voltage:250VAC
Contact Resistance:100mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:copper alloy
Insulator Material:High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous
★substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities, and
manufacturing processes regarding to customer's
specifications
"★": Safety Features
indicates product characteristics, functionalities, and
manufacturing processes complying to legal
regulations stated by local government

Recommended P.C.Board Layout (Tolerance:±0.05)

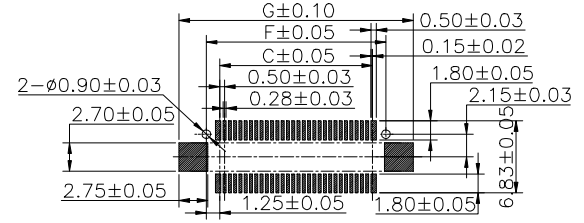

Pin数	80	46.40	44.50	39.50	28.50	42.60	42.00	47.20
Pin数	70	41.40	39.50	34.50	28.50	37.60	37.00	42.20
Pin数	60	36.40	34.50	29.50	28.50	32.60	32.00	37.20
Pin数	50	31.40	29.50	24.50	28.50	27.60	27.00	32.20
Pin数	40	26.40	24.50	19.50	11.00	22.60	22.00	27.20
Pin数	30	21.40	19.50	14.50	11.00	17.60	17.00	22.20
Pin数	20	16.40	14.50	9.50	11.00	12.60	12.00	17.20
Pin数	15	13.90	12.00	7.00	11.00	10.10	9.50	14.70
Pin数	No. of PIN/ROW	Dimension Information						
		A	B	C	D	E	F	G

A

Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.
C	mm	

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. CGAC201-CB001

PART NO. CGAC201-XXXXB001C19X

TITLE.

0.5mm PITCH BTB FLOATING CONNECTOR

1 2 3 4 5 6 7 8 9