

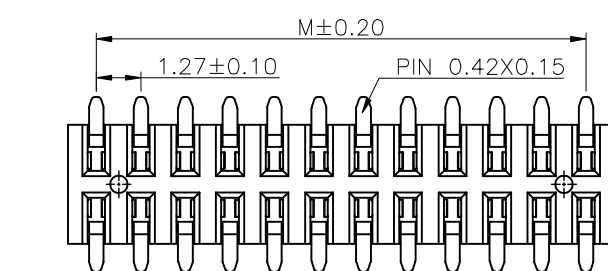



Type	Dim.D	Note
kapton	5.10	04~25 Pins
	10.00	26~40 Pins

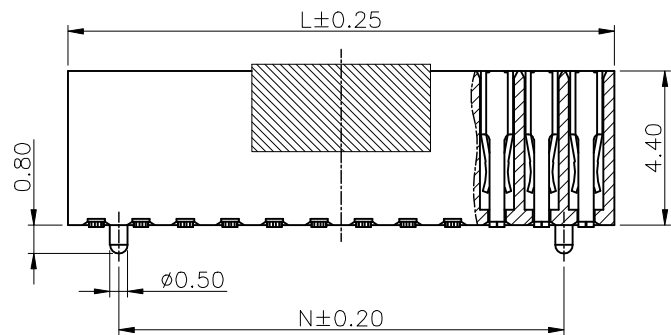

Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V−0
All materials must meet Greenconn
requirement for environment protection.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

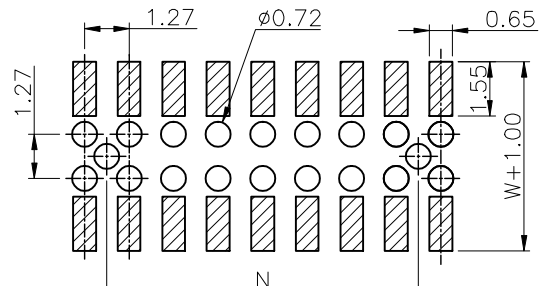

No. of PIN/ROW	Dimension Information		
	Dim.M	Dim.L	Dim.N
03	2.54	4.16	1.27
04	3.81	5.43	2.54
05	5.08	6.70	3.81
06	6.35	7.97	5.08
07	7.62	9.24	6.35
08	8.89	10.51	7.62
09	10.16	11.78	8.89
10	11.43	13.05	10.16
11	12.70	14.32	11.43
12	13.97	15.59	12.70
13	15.24	16.86	13.97
14	16.51	18.13	15.24
15	17.78	19.40	16.51
16	19.05	20.67	17.78
17	20.32	21.94	19.05
18	21.59	23.21	20.32
19	22.86	24.48	21.59
20	24.13	25.75	22.86
21	25.40	27.02	24.13
22	26.67	28.29	25.40
23	27.94	29.56	26.67
24	29.21	30.83	27.94
25	30.48	32.10	29.21
26	31.75	33.37	30.48
27	33.02	34.64	31.75
28	34.29	35.91	33.02
29	35.56	37.18	34.29
30	36.83	38.45	35.56
31	38.10	39.72	36.83
32	39.37	40.99	38.10
33	40.64	42.26	39.37
34	41.91	43.53	40.64
35	43.18	44.80	41.91
36	44.45	46.07	43.18
37	45.72	47.34	44.45
38	46.99	48.61	45.72
39	48.26	49.88	46.99
40	49.53	51.15	48.26

Ordering Information

C SEC218 - XX XX B XXX R

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code
No. of Pins per Row
03~40

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	CSEC218-CBXX
PART NO.	CSEC218-XXXX BXXX R1AX

TITLE:
1.27 FEMALE HEADER
DUAL ROWS SMT TYPE
CONNECTOR