

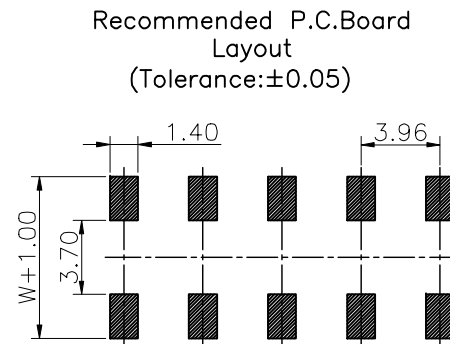
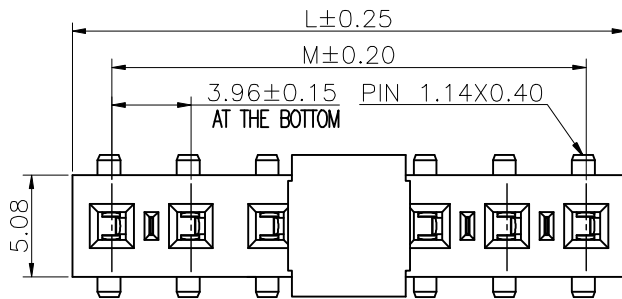





Specifications
 Current Rating:7.9Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1000VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

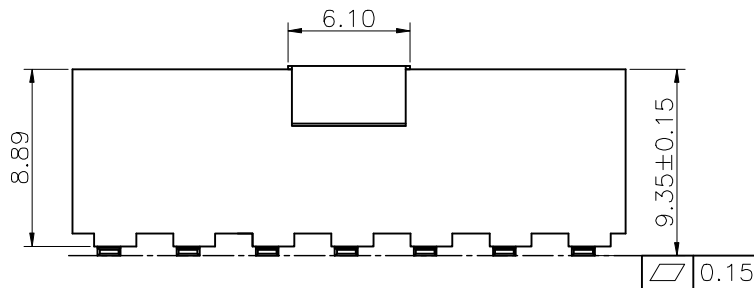

No. of PIN/ROW	Dimension Information	
	L	M
02	7.92	3.96
03	11.88	7.92
04	15.84	11.88
05	19.80	15.84
06	23.76	19.80
07	27.72	23.76
08	31.68	27.72
09	35.64	31.68
10	39.60	35.64
11	43.56	39.60
12	47.52	43.56
13	51.48	47.52
14	55.44	51.48
15	59.40	55.44
16	63.36	59.40
17	67.32	63.36
18	71.28	67.32
19	75.24	71.28
20	79.20	75.24
21	83.16	79.20
22	87.12	83.16
23	91.08	87.12
24	95.04	91.08

Ordering Information

C SJC101 - XX XX A XXX C

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code
 No. of Pins per Row
 02~24

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 R=Nylon(Halogen Free)
 C=LCP

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze

Packing code
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE				DESIGN:	DATE:	DWG. NO.	TITLE.
REV.	UNIT.	SCALE.	PAGE.	CHECKED:	DATE:	CSJC101-CAXX	
01	mm	3:1	1/1	AUDITED:	DATE:	PART NO.	
				APPROVED:	DATE:	CSJC101-XXXX AXXX C1AX	

3.96 PITCH POWER
 SOCKETS SMT TYPE
 CONNECTOR