


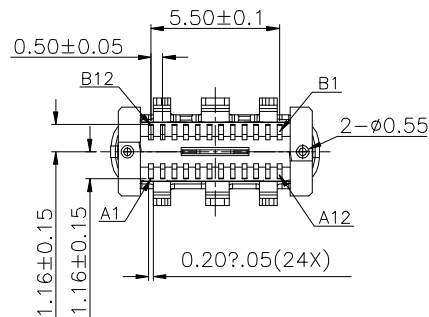



RoHS
Compliant

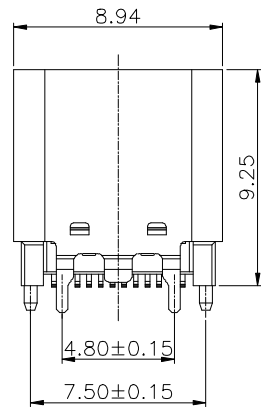



TYPE C协会认证TID NO. 2726

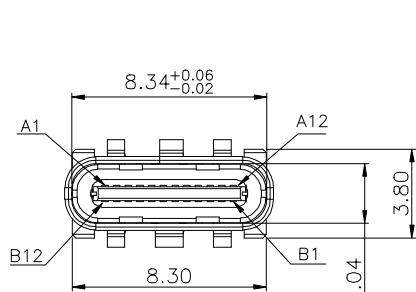

SECTION:A-A

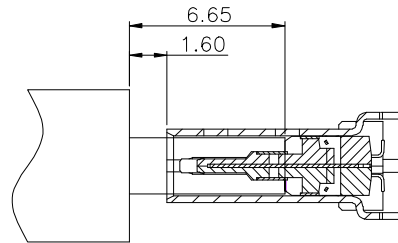

AFTER MATING

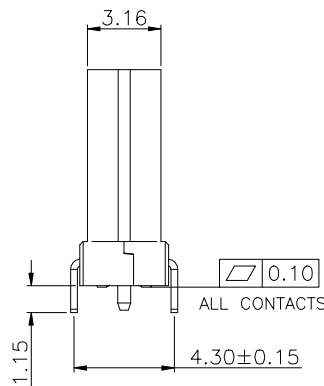

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC(LCP),UL94 V-0.
 - CONTACTS:COPPER ALLOY(C1814)T=0.12mm
 - MID PLATE: STAINLESS STEEL(SUS301)T=0.20mm
 - EMI PLATE: STAINLESS STEEL(SUS301)T=0.10mm
 - SHELL: STAINLESS STEEL(SUS304)T=0.30mm
- PLATING SPECIFICATION:
 - CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - FRONT SHELL&OUTER SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
 - MID PLATE:
CLEAR ONLY
 - EMI PLATE:
CLEAR ONLY
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 0.5~2.0kgf.
 - EXTRACTION FORCE: 0.8kgf~2.0kgf.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING:5.0A
VOLTAGE RATING:5.0V
 - LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
- IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

Ordering Information

C UAC204-12

XX

B

001

C

X

6

X

Standard Plating
64=3u" Gold/Tin
Selective Plating
58=30u" Gold/Tin
05=Gold Flash/Tin
.....

Color
1=Black

Standard Packing
F=(Products+Cap)T&R

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.±	X.±
.X'±	.X±0.30
.XX'±	.XX±0.25
.XXX'±	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUAC204-CB1C6

PART NO.

CUAC204-12XXB001CX6X

TITLE.



USB 3.1 TYPE C FEMALE
VERTICAL H9.25mm SMT
TYPE

REV.	UNIT.	SCALE.	PAGE.	
A	mm	1:1	1/2	

RoHS
Compliant



TYPE C协会认证TID NO. 2726

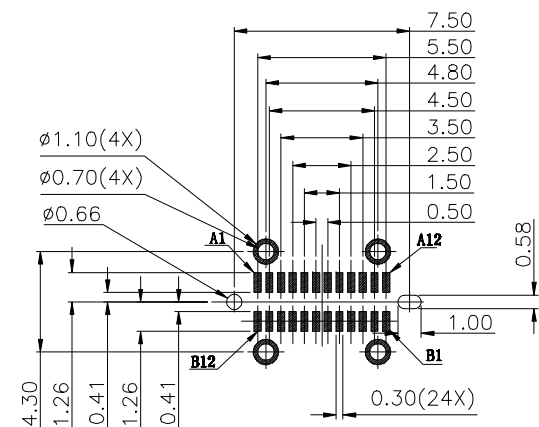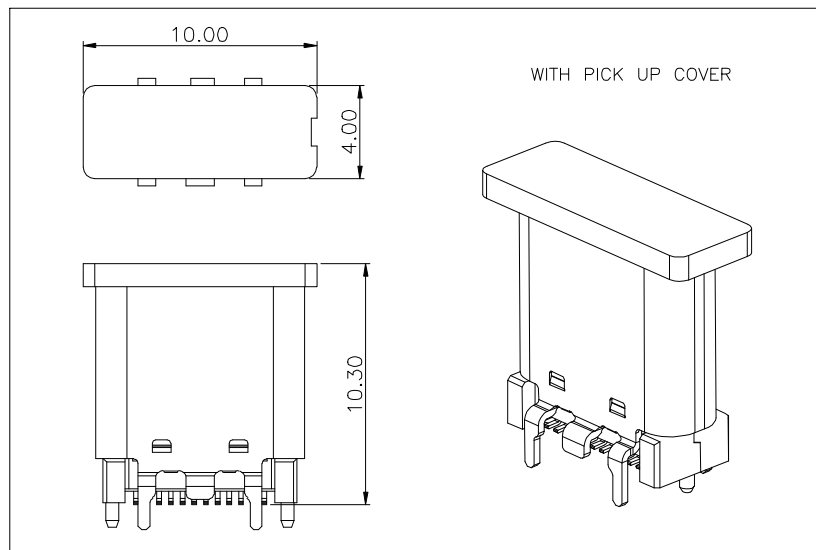

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS 1.5 $\pm$.10MM;DEFAULT TOLERANCE:?.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X. $\pm$	X. $\pm$
.X $\pm$	.X $\pm$ 0.30
.XX $\pm$	.XX $\pm$ 0.25
.XXX $\pm$	.XXX $\pm$ 0.10

DESIGNED:

DATE:

DWG. NO.

CUAC204-CB1C6

TITLE.

USB 3.1 TYPE C FEMALE
VERTICAL H9.25mm SMT
TYPE

CHECKED:

DATE:

PART NO.

CUAC204-12XXB001CX6X

APPROVED:

DATE:

REV.
A

UNIT.
mm

SCALE.
1:1

PAGE.
2/2

