

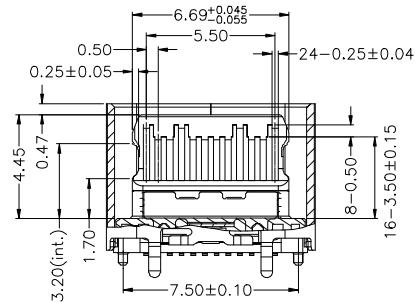
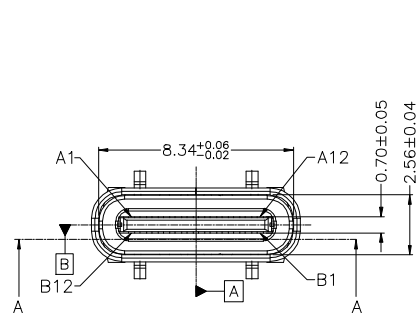

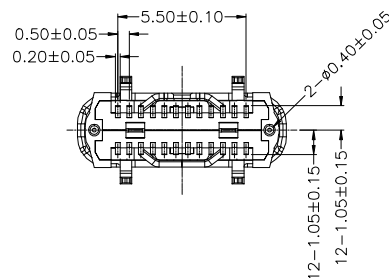





SECTION A-A
SCALE 1:1



NOTE:

- MATERIAL SPECIFICATION:
 - 1-HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC(LCP), UL94 V-0. COLOR:BLACK.
 - 1-2.CONTACTS: COPPER ALLOY(C18150)T=0.12mm
 - 1-3.MID PLATE: STAINLESS STEEL(SUS301)T=0.15mm
 - 1-4.EMI PLATE: STAINLESS STEEL(SUS301)T=0.10mm
 - 1-5.SHELL: STAINLESS STEEL(SUS304)T=0.30mm
- PLATING SPECIFICATION:
 - 2-1.CONTACTS: Ni 50u" MIN. UNDER PLATED OVER ALL. Au PLATED ON THE MATING AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N) GF PLATED ON THE SOLDER AREA.
 - 2-2.SHELL: Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3.MID PLATE: CLEAR ONLY
 - 2-4.EMI PLATE: CLEAR ONLY
- MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.EXTRACTION FORCE: 0.8kgf~2.0kgf. 0.6kgf~2.0kgf. AFTER DURABILITY TEST.
 - 3-3.DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5.0A VOLTAGE RATING:5.0V
 - 4-2. LLCR: VBUS & GND PINS AND OTHER PINS: 40mQ/PIN MAX. SHIELD: 50mQ/MAX. LLCR MAX. CHANGE OF ALL PINS: 10mQ.
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

Ordering Information

C UAC205-12

XX

B

001

C

X

6

X

Standard Plating
09=3u"Gold on contact/
gold flash on other area
Selective Plating
02=GOLD Flash
.....

Color
1=Black

Standard Packing
F=(Products+Cap)T&R
Selective Plating
B=Tray
.....

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.±	X.±
.X'±	.X±0.30
.XX'±	.XX±0.25
.XXX'±	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUAC205-CB1C6



PART NO.

CUAC205-12XXB001CX6X


TITLE.

USB TYPE C FEMALE
24PIN VERTICAL TYPE
SHELL H6.50mm

REV.	UNIT.	SCALE.	PAGE.	
A	mm	1:1	1/2	

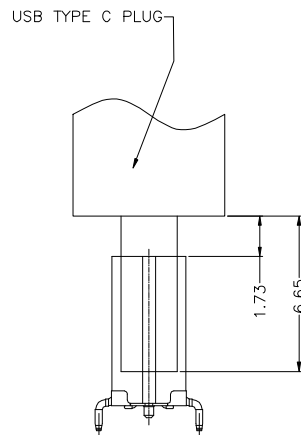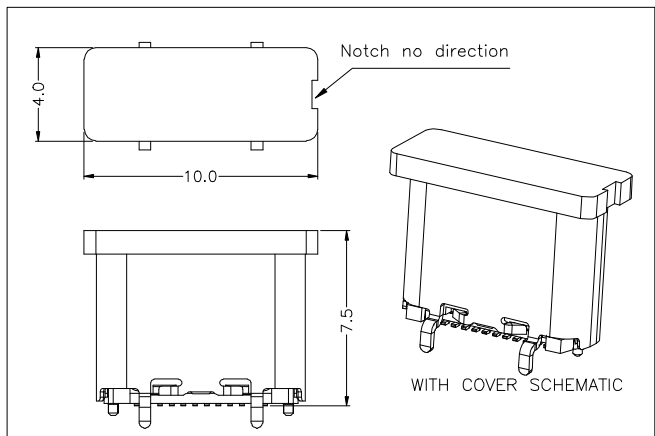

FEMALE AND MALE MATCHING DRAWING

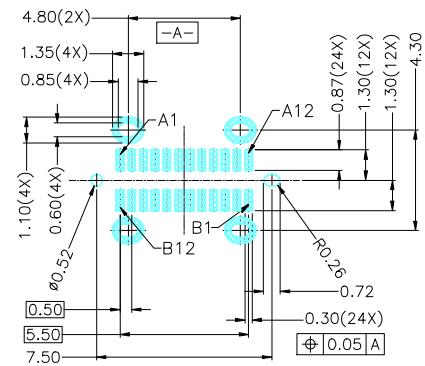

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.8±0.10MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE					DESIGNED:	DATE:	DWG. NO.	TITLE.
REV.	UNIT.	SCALE.	PAGE.				CUAC205-CB1C6	USB TYPE C FEMALE 24PIN VERTICAL TYPE SHELL H6.50mm
A	mm	1:1	2/2		CHECKED:	DATE:	PART NO.	
					APPROVED:	DATE:	CUAC205-12XXB001CX6X	