

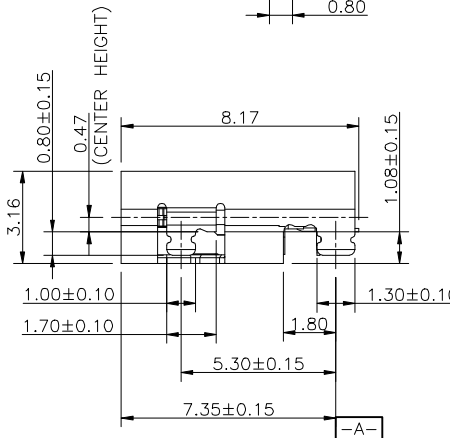

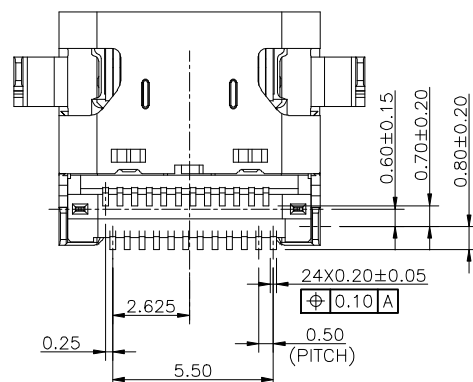
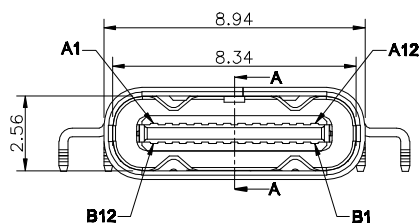


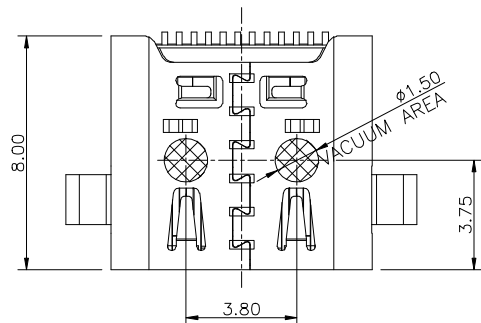

Specifications
 Current Rating:5.0Amp
 Voltage Rating:5V AC
 Insulation Resistance:100MΩ Min.
 Dielectric Withstanding Voltage:100VAC
 Contact Resistance:40mΩ Max.
 Mating force:5~20N
 Unmating force:8~20N
 Durability Cycle:10,000 cycle
 Operating Temperature:-40°C to +85°C
Materials
 Insulation Material:UL94V-0 PA9T
 All materials must meet GREENCONN hazardous substances control standards.

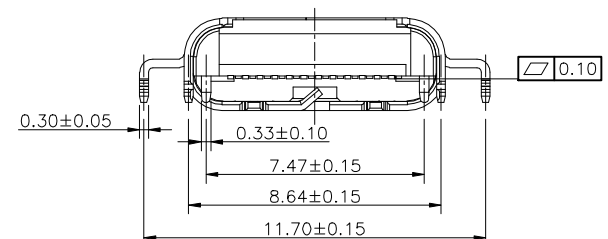

PIN ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND

Ordering Information

C UAD212 - XX XX A 001 D X 9 X
 No. of Pins 24 Standard Plating 09=Gold 3U" Color 1=Black Standard Packing D=Tape&Reel



3RD.ANG
 PROJ.
 PAGE. 1/2

GENERAL TOLERANCE	
X'±5.0'	X±0.50
.X'±2.0'	.X±0.38
.XX'±1.0'	.XX±0.25
.XXX'±/	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
 CUAD212-CA001D9
 PART NO.
 CUAD212-XXXX A001DX9X

TITLE.
 Conn USB 4.0 TYPE 母座
 无后盖 单壳 双贴SMT

