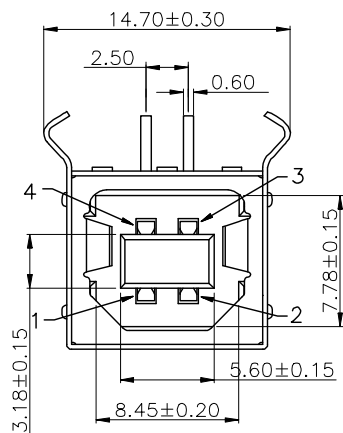




PCB LAYOUT

MATERIAL

1. INSULATOR: PBT(UL94V-0),
2. CONTACT: BRASS, PLATING SEE PART NUMBER
3. SHELL: BRASS&SPCC
4. COVER: SPCC,

SPECIFICATIONS:

1. CURRENT RATING: 1.5A AC,DC.
 2. VOLTAGE RATING: 30V AC,DC.
 3. CONTACT RESISTANCE:30mΩ MAX.
 4. INSULATION RESISTANCE:1000Ω MIN.
 5. WITHSTANDING VOLTAGE:500V AC/MINUTE.
 6. TEMPERATURE RANGE: -50°C ~ +85°C.
- All materials must meet GREENCONN hazardous substances control standards.

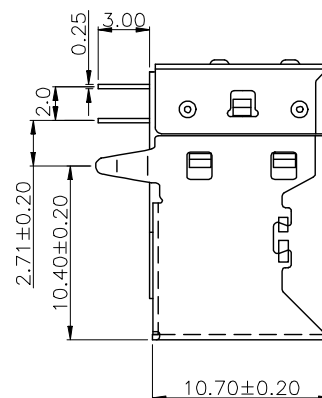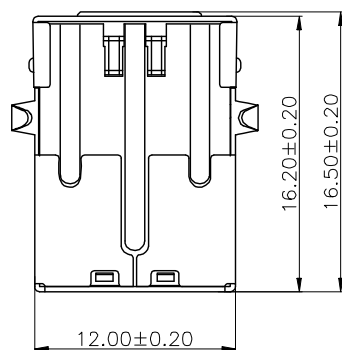

Ordering Information

C UGB203 - 04 XX A 001 A X Z X

No.of Pins
04

Standard Plating
05=Gold Flash/Tin
Selective Plating
64=Gold 3u"/Tin
.....

Color
1=Black
2=White
...


Standard Packing
B=Tray



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±5.0'	X.±0.35
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUGB203-CA001AZ

PART NO.

CUGB203-04XXA001AXZX

TITLE.

**USB BF 90° 插板有後蓋
(改後後蓋)**