

1 2 3 4 5 6 7 8 9

F





E

D

C


B

A

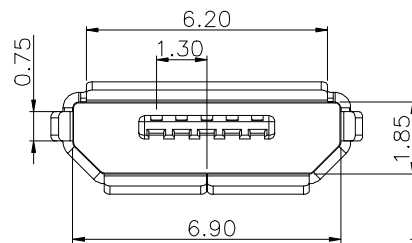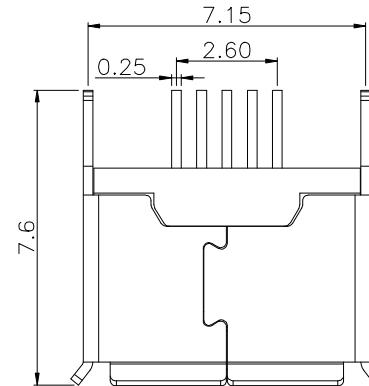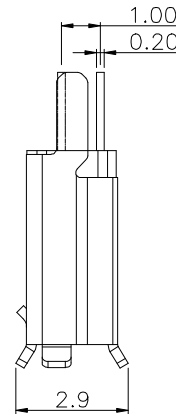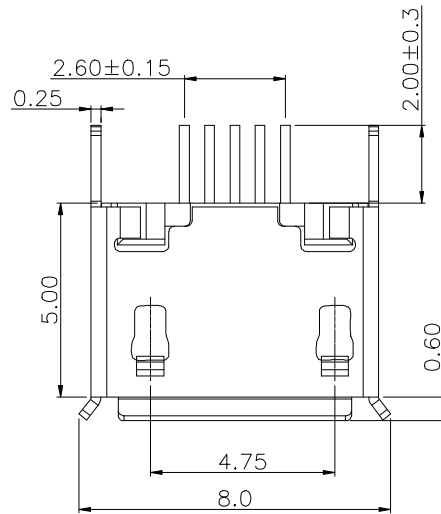

Specifications

Current Rating:1AMP
Insulation Resistance:100MΩMin.
Dielectric Withstanding Voltage:100VAC
Contact Resistance:30mΩMax.
Operating Temperature:-30°C to +80°C
Total mating force: 3.57Kg Max.
Total unmating force:0.8 kgf Min
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP
All materials must meet GREENCONN hazardous substances control standards.

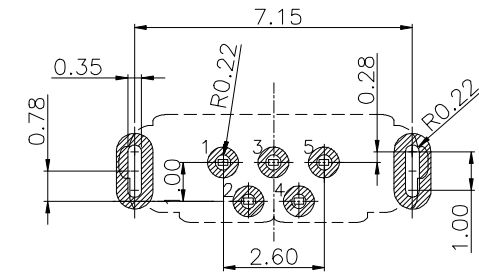

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

TABLE:

3	SHELL	SUS304 T=0.25mm	厚度60u* min; 厚度30u* min	1PCS
2	CONTACT	C5191 T=0.15	G/F PLATING, NI UNDERPLATING OVERALL	1SET
1	HOUSING	LCP UL94V-0	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

Ordering Information


C UZA243 - 05 XX A 002 C X A X
No. of pins 05 Standard Plating 02=Gold Flash Color 1=Black Standard Packing D=Tape&Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ±5.0'	X. ±0.35
.X' ±3.0'	.X ±0.30
.XX' ±2.0'	.XX ±0.25
.XXX' ±1.0'	.XXX ±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

CUZA243-CA002CA

PART NO.

CUZA243-05XXA002CXAX

TITLE.

MCR0 5P/F B TYPE
180 插板间距 2.0mm 有电边

1 2 3 4 5 6 7 8 9