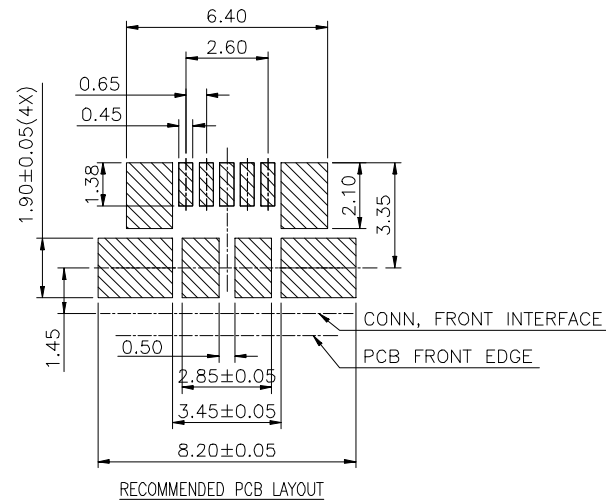

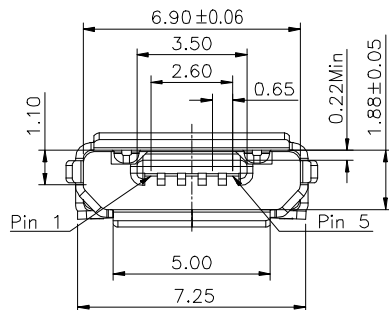



SPECIFICATION:  
CURRENT RATING: VBUS & GND PINS:1.8A MAX.  
OTHER PINS: 0.5A MAX.  
INSULATION RESISTANCE: 100MΩ MIN  
CONTACT RESISTANCE: 30 MILLIONHM MAX  
DIELECTRIC WITHSTAND VOLTAGE,AC 100V  
FOR 1 MINUTE.  
Contact Material: Brass  
Insulator Material:High Temperature  
Thermoplastic, UL 94V-0 LCP or  
the equivalent material  
All materials must meet GREENCONN  
hazardous substances control standards .

## Ordering Information

C UZD182 - 05 XX A 001 C X Z X

No. of Pins  
05

Standard Plating  
02=Gold Flash  
Selective Plating  
05=Gold Flash/Tin

Color  
1=Black


Standard Packing  
D=Tape&Reel



Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 1/1

### GENERAL TOLERANCE

|            |          |
|------------|----------|
| X.±3.0"    | X.±/     |
| .X"±2.0"   | .X±0.30  |
| .XX"±1.5"  | .XX±0.25 |
| .XXX"±1.0" | .XXX±/   |

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

CUZD182-CA1CZ

PART NO.

CUZD182-05XXA001CXZX

TITLE.

MICRO USB 5P 四脚平  
貼無柱有卷邊