

1 2 3 4 5 6 7 8 9

F







E

D

C

B

A

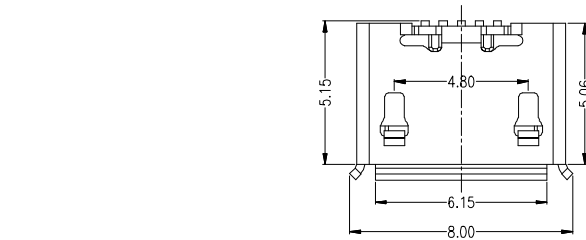



Note:

1.Material:

- 1.1 Housing: UL94v-0,LCP **Black**
- 1.2 Contact: C5195 t=0.15mm
- 1.3 Shell: C2680 t=0.30mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

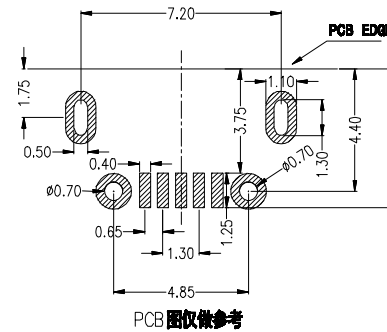

## Ordering Information

C UZD192 - 05

XX

A

001

C

X

S

X

Standard Plating  
05=Gold Flash/Tin  
Selective Plating  
01=Tin  
02=Gold Flash

Color  
1=Black


Standard Packing  
D=Tape&Reel



Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. C UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 1/1

### GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X.'±5.0'   | X.±/      |
| .X'±3.0'   | .X±0.30   |
| .XX'±2.0'  | .XX±0.25  |
| .XXX'±1.0' | .XXX±0.10 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZD192-CA1CS

PART NO.

CUZD192-05XXA001CXSX

TITLE.

MICRO USB 5S B 四脚全插  
(牛角型) 短针

1 2 3 4 5 6 7 8 9