

1

2

3

4

5

6

7

8

9

F






E

D

C

B

A

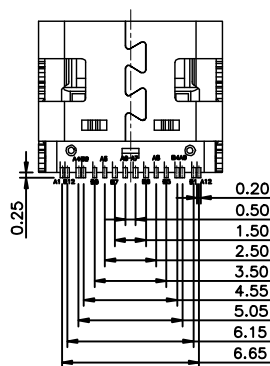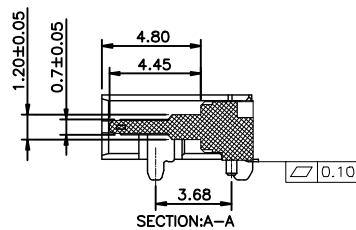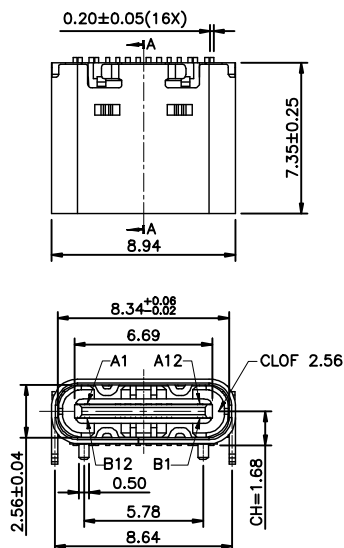

Specifications
Current Rating:5.0Amp
Insulation Resistance:100M Min.
Dielectric Withstanding
Voltage:100VAC
Operating Temperature:-25°C to +85°C
Materials
Contact Material:BRASS
Insulation Material:High Temperture Thermoplastic UL94V-0 LCP
COLOR:BLACK
All materials must meet Greenconn's requirements for environmental protection

Ordering Information

C UZD196 - XX XX B 002 C X Z X

No. of Pins per Row
16

Standard Plating
B1=Gold 3u"

Color
1=Black

Standard Packing
B=Tray
D=T&R



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.
01

UNIT.
mm

SCALE.
1:1

3RD.ANG
PROJ.



PAGE.
1/1

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZD196-CB2CZ

PART NO.

CUZD196-XXXX B002CXZX

TITLE.

USB CF 16PIN (L=7.35)
WITH POST一体成型