
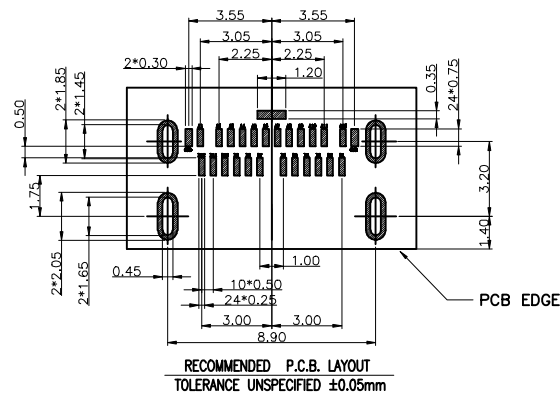




NOTES:

SPECIFICATION:





1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. 防水等級 IP67

Contact Material: COPPER ALLOY

SHELL: STAINLESS STEEL

Insulator Material: HIGH TEMPERATURE PLASTIC

All materials must meet GREENCONN hazardous substances control standards.

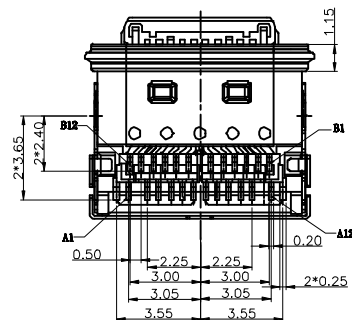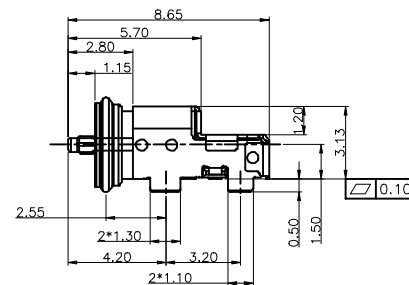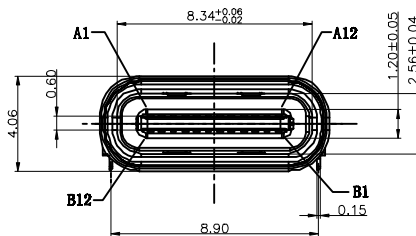

A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRX1P2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Ordering Information

C UZD216 - 12 XX F 001 C X 6 X

Standard Plating
09=Gold 3u"
Selective Plating
.....

Color
1=Black

Standard Packing
D=Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

CUZD216-CF1C6

TITLE:

TYPE C F 双排SMT板上防水型

CHECKED:

DATE:

PART NO.

CUZD216-12XXF001CX6X

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1