

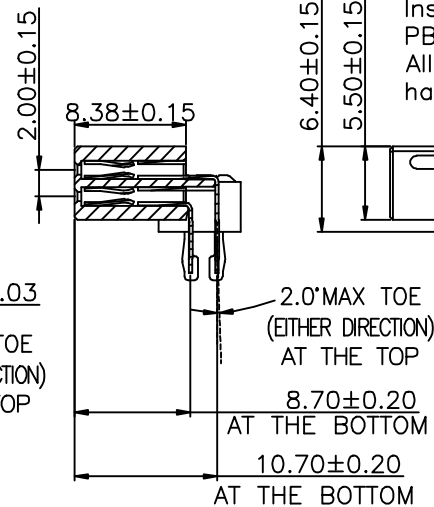
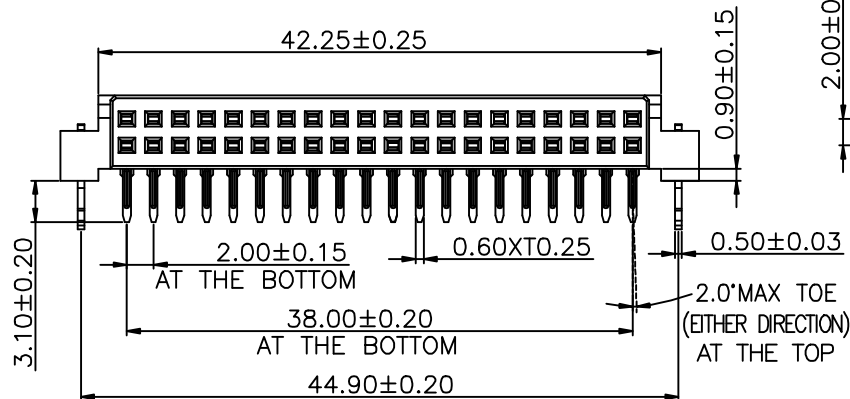


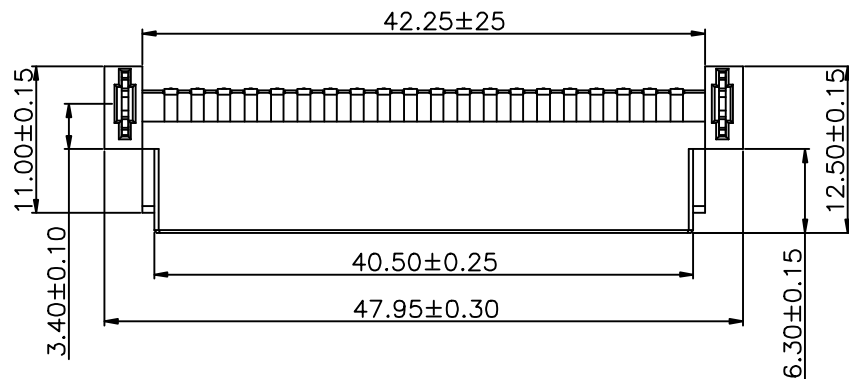

Specifications
 Current Rating:3.0AmpAC/DC
 Voltage rating:250V AC/DC
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1000VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-25°C to +85°C
 Materials
 Contact Material:Phosphor Bronze
 Stabilizer Material:Brass
 Insulator Material:Thermoplastic, UL 94V-0
 PBT or the equivalent material
 All materials must meet GREENCONN
 hazardous substances control standards.

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

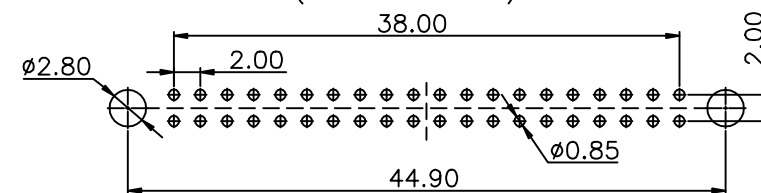

Ordering Information

C WFB201 - XX XX A 001 K X S X
 No. of Pins per Row 20
 Standard Plating 01=Ni: 50~100u", Tin80~160u"
 Color 2=White
 Standard Packing C=Tube

格稜股份有限公司
Greenconn Corporation

REV. A UNIT. mm SCALE. 2:1 PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	CWFB201-CA1KS
PART NO.	CWFB201-XXXXA001K2SX

TITLE.
 2.00mm Pitch Connector