




N=Number of contacts

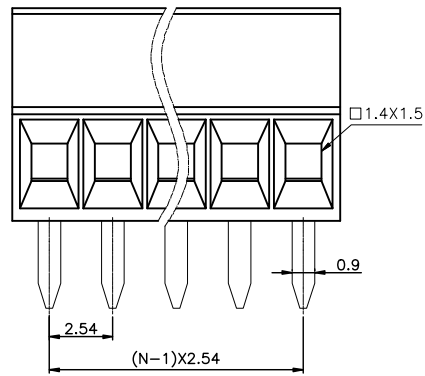

Specifications
 Voltage rating:150VAC
 Current rating:6 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2000VAC(1min)
 Test time:60sec/1pcs
 wire range: 18~30AWG
 Mechanical:
 Torque:1.5kgf.cm/M1.6
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

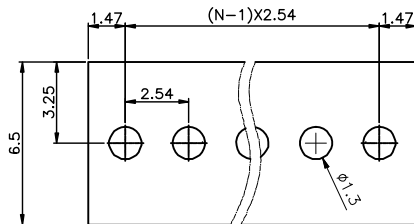

P.C.B LAYOUT

Ordering Information

C XHA102 - XX XX A 001 E X Z X

No. of Pins per Row 02~24 Standard Plating 01=Tin

Color 1=Black 6=Grey 7=Blue G=Green

Standard Packing R=Carton Selective Packing N=PE Bag



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXHA102-CA1EZ

PART NO.

CXHA102-XXXXA001EXZX

TITLE.

Pitch 2.54mm-series