


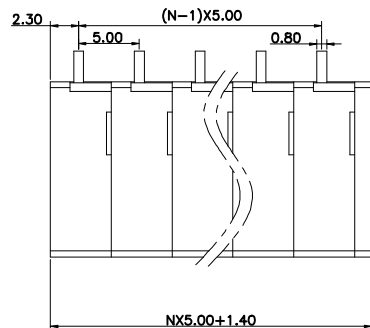




N=Number of contacts

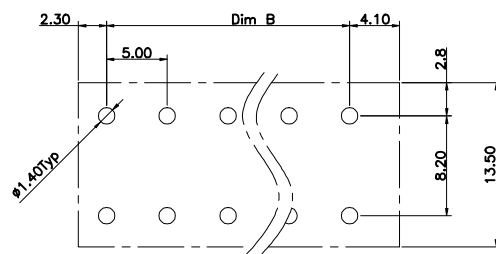

Poles	Tolerance
1p-6p	±0.10
7p-12p	±0.20
13p-18p	±0.30
19p-24p	±0.40

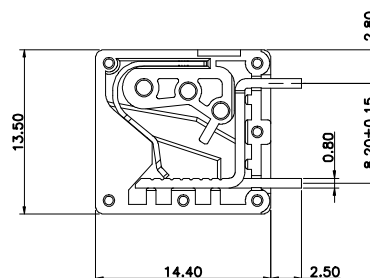

P.C.B LAYOUT
Top view

Specifications
 Voltage rating:300VAC
 Current rating(Sol):13 A
 Current rating(Str):16 A
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 1.6kV
 Solid wire range: 14-24AWG
 Stranded wire range: 12-24AWG
Mechanical:
 Torque:/
 Operating temperature:-40°C to+115°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C XLA205 - XX XX A 001 E X B X

No. of Pins per Row 01~24 Standard Plating 01=Tin Color 1=Black 2=White 3=Yellow 6=Gray 7=Blue A=Orange G=Green R=Red Standard Packing R=Carton



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1

3RD.ANG
PROJ.

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.10
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXLA205-CA001EB

PART NO.

CXLA205-XXXX A001EXBX

TITLE.

5.00 Series 1P-24P
Vertical (90D wire inlet)