

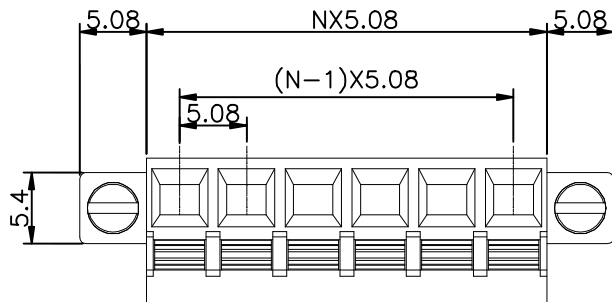


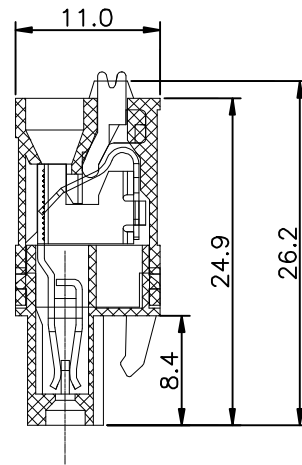

N=Number of confacs

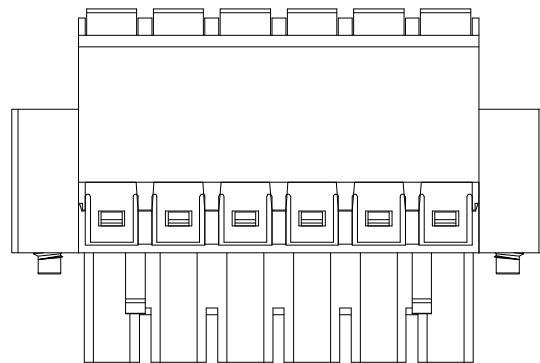

Specifications
Voltage rating:300VAC
Current rating: 16 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
withstanding Voltage: 2500VA(1min) Test time:60sec/1pcs
Wire range:12-26AWG
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.


Ordering Information

CXMZ101 - XX XX A 013 E X B X
No.of Pins Per Row 02~24 Standard Plating 01=Tin Color 7=Blue G=Green Standard Packing R=Cartons



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

CXMZ101-CA013EB

PART NO.

CXMZ101-XXXXA013EXBX

TITLE.

Pitch5.08mm-series(加耳扣螺丝)