
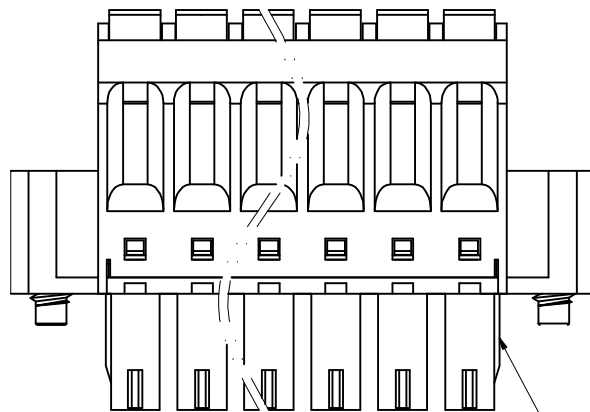


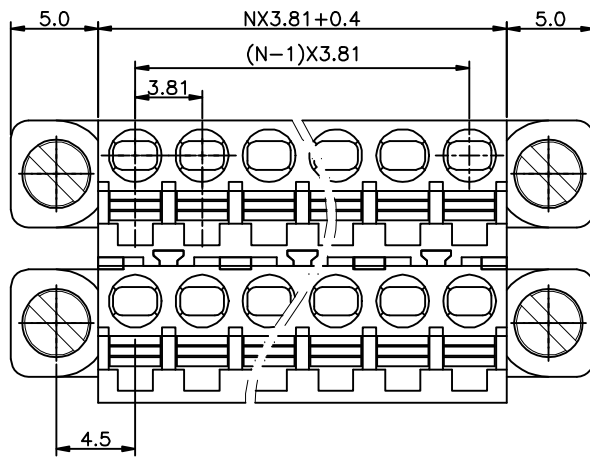

2p fo 6p with wedge,above7p
without wedge(including 7p)

N=Number of contacts

Specifications
Voltage rating:300VAC
Current rating:12 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
Wire range: 16-24AWG
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

CXZZ202 - XX XX A 007 E X B X


No. of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Cartons



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXZZ202-CA007EB

PART NO.

CXZZ202-XXXXA007EXBX

TITLE.

Pitch3.81mm-series