

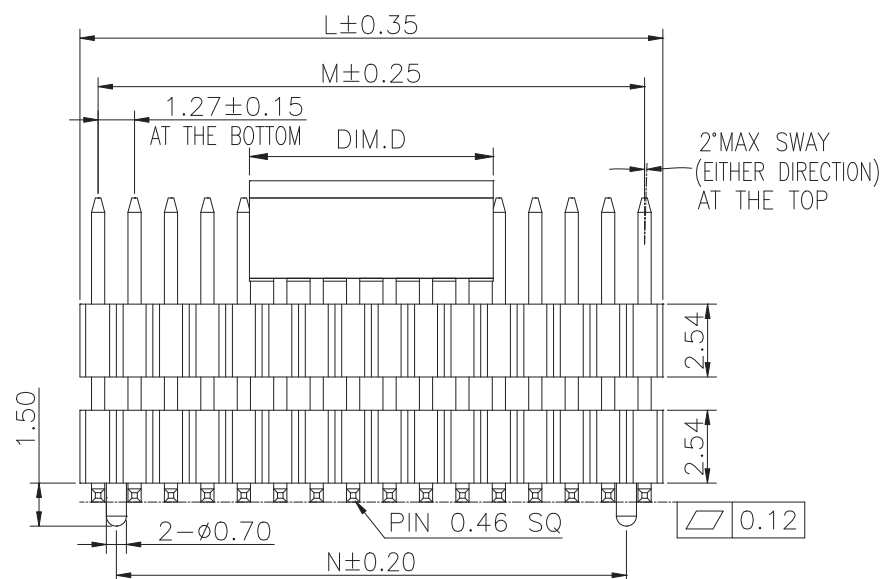


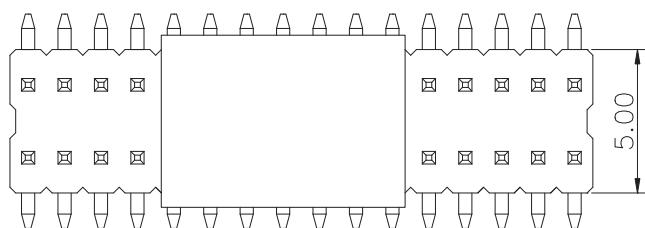


Ordering Information

G PEC260 - XX XX B XXX C
 Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple
 Water code
 No. of Pins per Row
 02~50
 Positioning column information
 A=No locating post
 B=Round post
 C=Square post
 Pin length
 See the drawing
 Insulator Materi
 R=Nylon(Halogen
 C=LCP
 Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V−0 LCP
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.

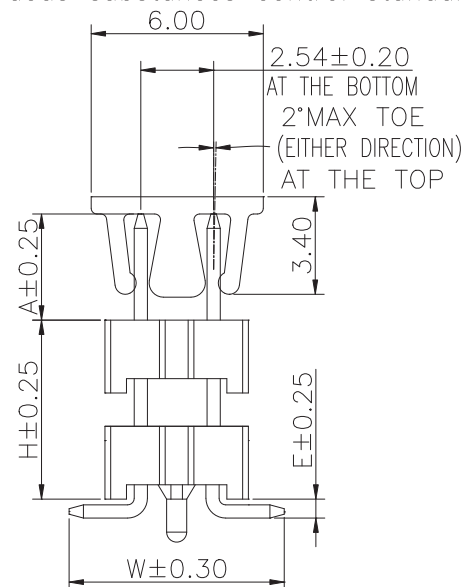

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

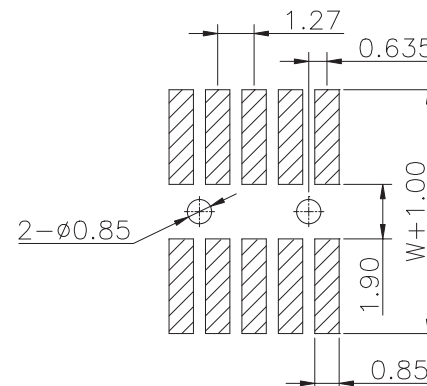

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	Dimension Information		
	L	M	N		L	M	N
02	2.54	1.27		27	34.29	33.02	31.75
03	3.81	2.54		1.27	28	35.56	34.29
04	5.08	3.81	2.54	29	36.83	35.56	34.29
05	6.35	5.08	3.81	30	38.10	36.83	35.56
06	7.62	6.35	5.08	31	39.37	38.10	36.83
07	8.89	7.62	6.35	32	40.64	39.37	38.10
08	10.16	8.89	7.62	33	41.91	40.64	39.37
09	11.43	10.16	8.89	34	43.18	41.91	40.64
10	12.70	11.43	10.16	35	44.45	43.18	41.91
11	13.97	12.70	11.43	36	45.72	44.45	43.18
12	15.24	13.97	12.70	37	46.99	45.72	44.45
13	16.51	15.24	13.97	38	48.26	46.99	45.72
14	17.78	16.51	15.24	39	49.53	48.26	46.99
15	19.05	17.78	16.51	40	50.80	49.53	48.26
16	20.32	19.05	17.78	41	52.07	50.80	49.53
17	21.59	20.32	19.05	42	53.34	52.07	50.80
18	22.86	21.59	20.32	43	54.61	53.34	52.07
19	24.13	22.86	21.59	44	55.88	54.61	53.34
20	25.40	24.13	22.86	45	57.15	55.88	54.61
21	26.67	25.40	24.13	46	58.42	57.15	55.88
22	27.94	26.67	25.40	47	59.69	58.42	57.15
23	29.21	27.94	26.67	48	60.96	59.69	58.42
24	30.48	29.21	27.94	49	62.23	60.96	59.69
25	31.75	30.48	29.21	50	63.50	62.23	60.96
26	33.02	31.75	30.48				

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DWG. NO.	TITLE.
					X.°±5.0°	X.±0.30	GPEC260-CBXX	
					.X°±3.0°	.X±0.25	PART NO.	
					.XX°±2.0°	.XX±0.15		
					.XXX°±1.0°	.XXX±0.10		GPEC260-XX XX BXXXC1ZX
REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1		1.27 PIN HEADER DUAL ROWS SMT TYPE CONNECTOR			