

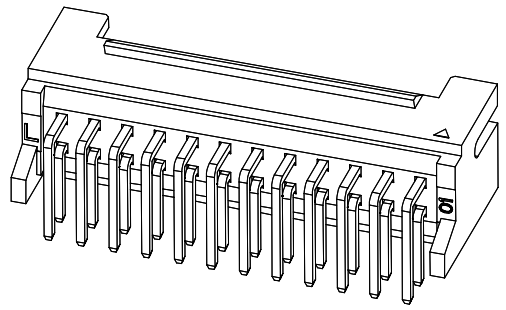
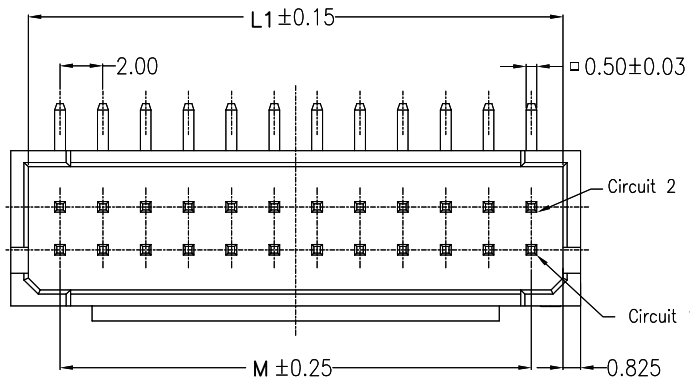
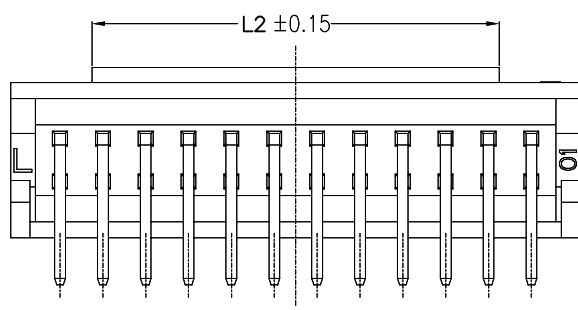
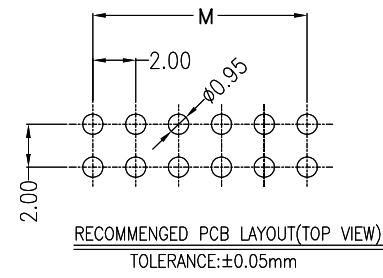


F
E
D
C
B
A

F
E
D
C
B
A

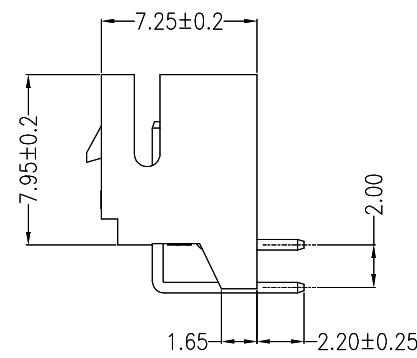

Specifications:
Contact resistance: $\leq 30\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 250V AC DC
Rated current: 3.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Housing: LCP UL94V-0, Natural
Contacts: Brass
All materials must meet GREENCONN hazardous substances control standards.

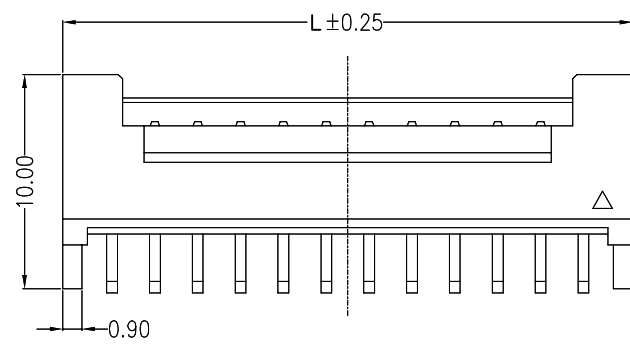

Ordering Information

GWFB214 - XX XX A 002 C X B X
No. Of Pins Per Row 02~16 Standard Plating 01=Tin Color 2=White 5=Beige Standard Packing N=PE Bag D=T&R

No. Of Pins Per Row	Dimensions(mm)			
	M	L1	L	L2
02	2.00	4.95	6.60	3.00
03	4.00	6.95	8.60	3.00
04	6.00	8.95	10.60	3.00
05	8.00	10.95	12.60	5.00
06	10.00	12.95	14.60	7.00
07	12.00	14.95	16.60	9.00
08	14.00	16.95	18.60	11.00
09	16.00	18.95	20.60	13.00
10	18.00	20.95	22.60	15.00
11	20.00	22.95	24.60	17.00
12	22.00	24.95	26.60	19.00
13	24.00	26.95	28.60	21.00
14	26.00	28.95	30.60	23.00
15	28.00	30.95	32.60	25.00
16	30.00	32.95	34.60	27.00


AQ



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.50
.X*±3.0°	.X±0.30
.XX*±2.0°	.XX±0.20
.XXX*±1.0°	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GWFB214-CA002CB
PART NO.
GWFB214-XXXXA002CXBX

TITLE.
2.00 PITCH 90° WAVE DIP TYPE