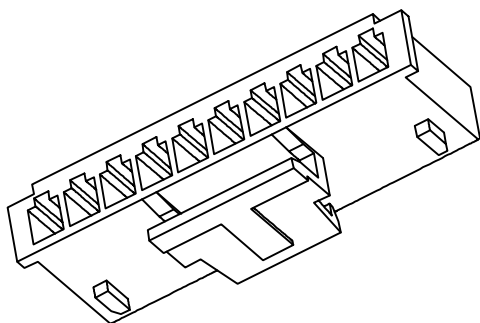
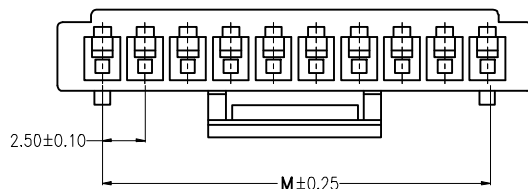

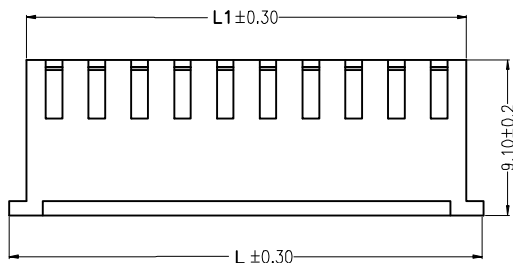


Specifications
Current Rating:3Amp
Voltage Rating:250V AC DC
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1000VAC
Contact Resistance:20mΩMax.
Operating Temperature:−25°C to +85°C
Materials
Insulator Material: UL 94V−0 PA66
All materials must meet GREENCONN
hazardous substances control standards.
Mating with: GRG126−T2

No. of Pins/Row	Dimension Information		
	M	L1	L
02	2.50	5.75	7.50
03	5.00	8.25	10.00
04	7.50	10.75	12.50
05	10.00	13.25	15.00
06	12.50	15.75	17.50
07	15.00	18.25	20.00
08	17.50	20.75	22.50
09	20.00	23.25	25.00
10	22.50	25.75	27.50
11	25.00	28.25	30.00
12	27.50	30.75	32.50
13	30.00	33.25	35.00
14	32.50	35.75	37.50
15	35.00	38.25	40.00
16	37.50	40.75	42.50
17	40.00	43.25	45.00

Ordering Information

GWG201 - XX A XX

No. of Pins/Row
02~17


Material/Color
P1=NY66/White



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ± 5.0°	X. ± 0.50
.X' ± 3.0°	.X ± 0.30
.XX' ± 2.0°	.XX ± 0.25
.XXX' ± 1.0°	.XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWG201-HA

PART NO.

GWG201-XX A P1

TITLE.

2.5mm pitch Housing