

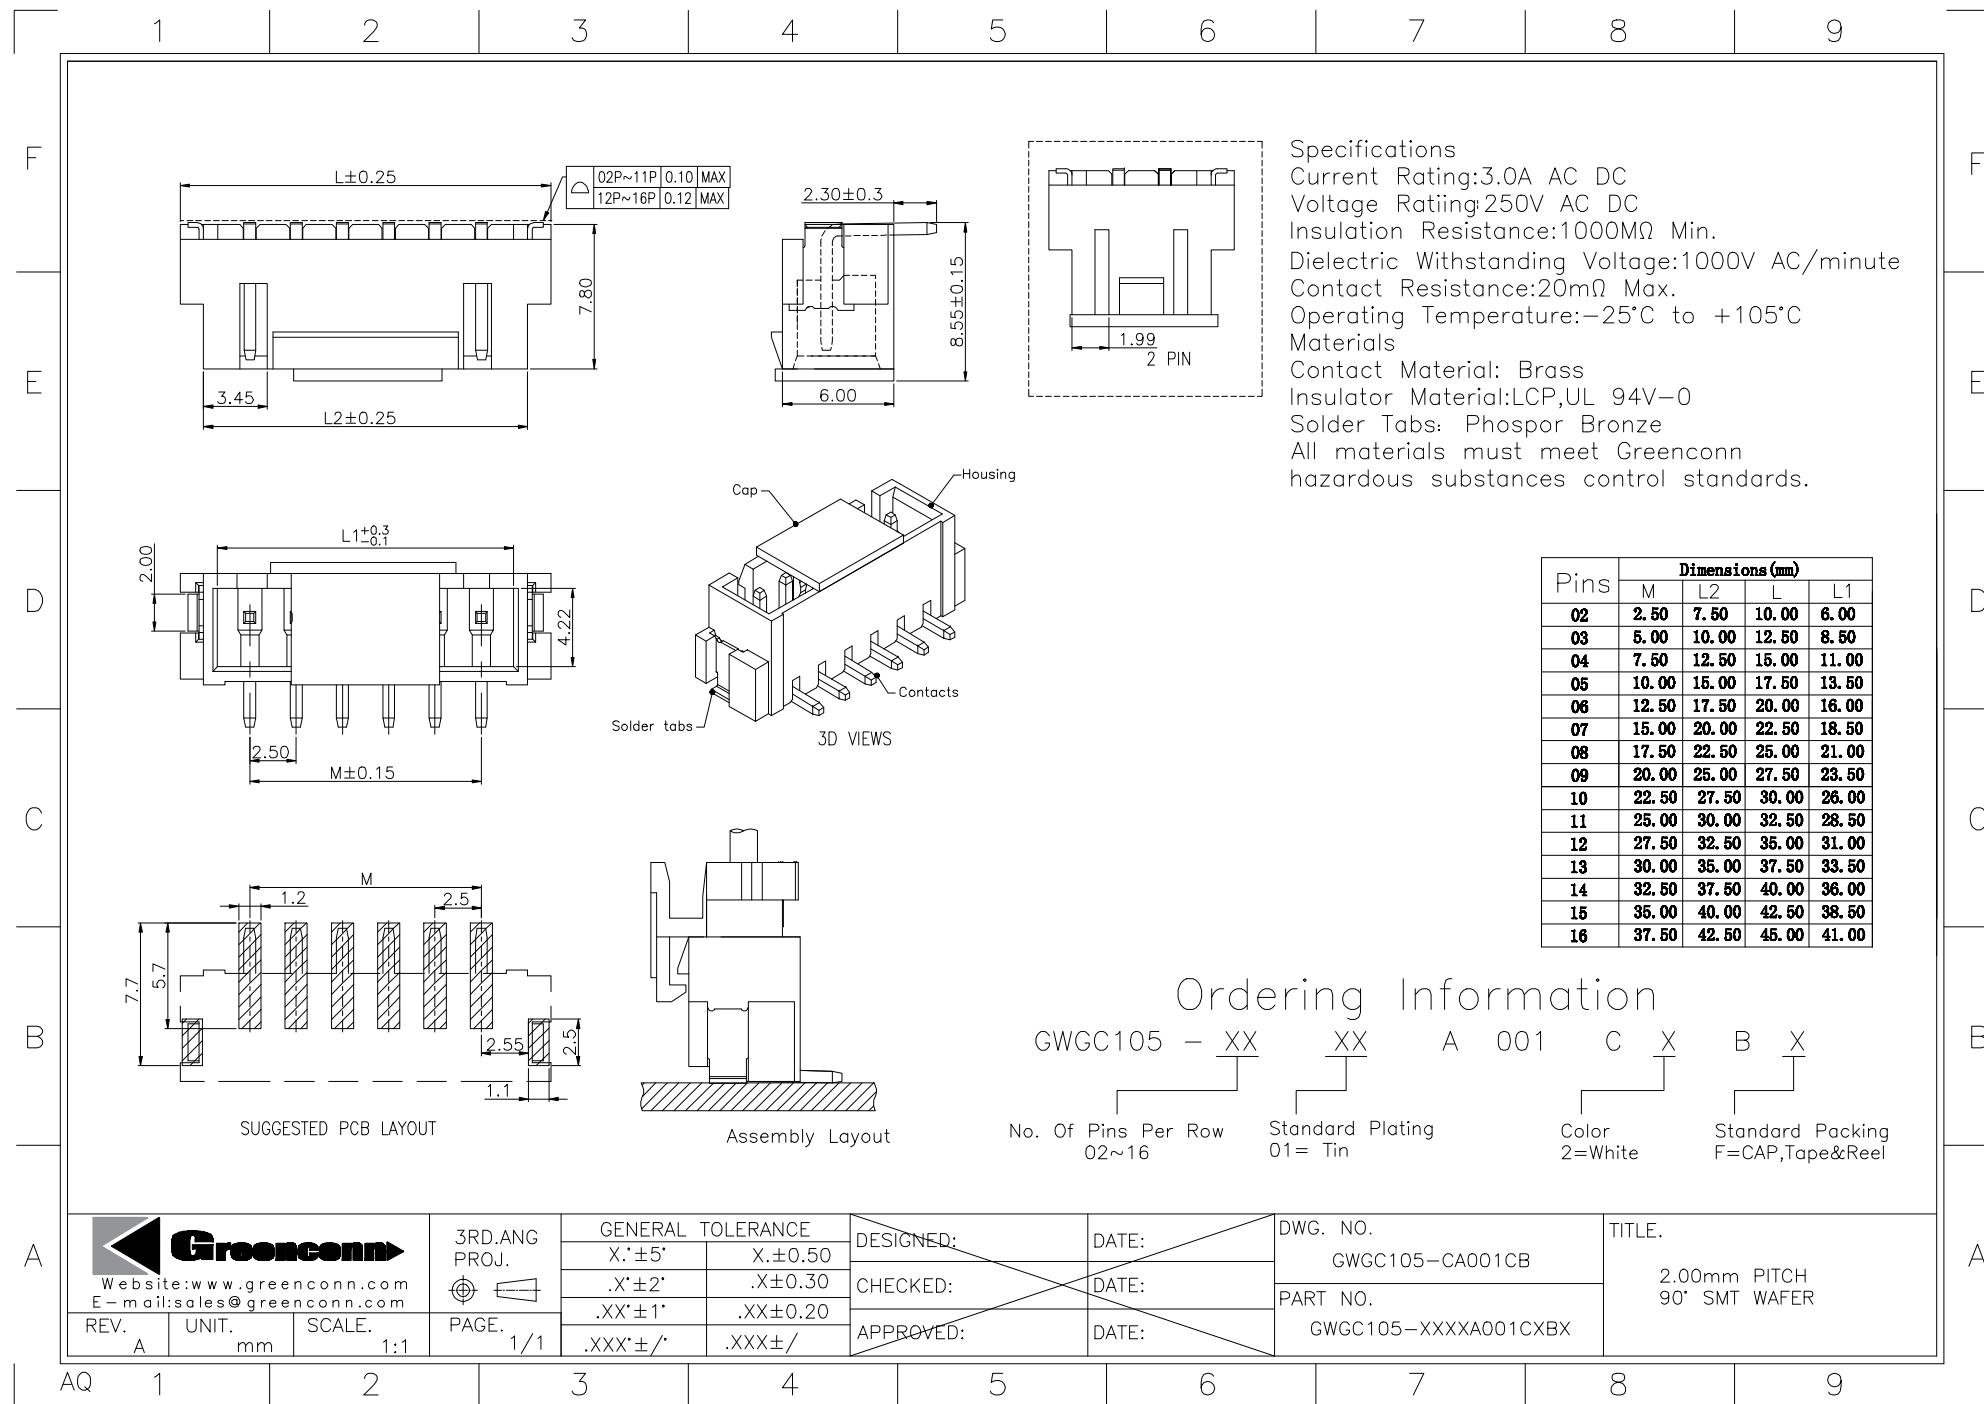
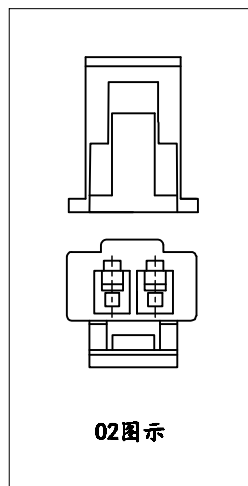
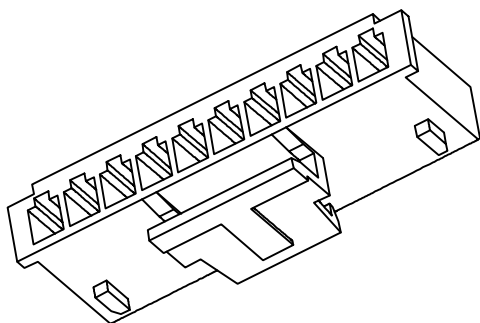
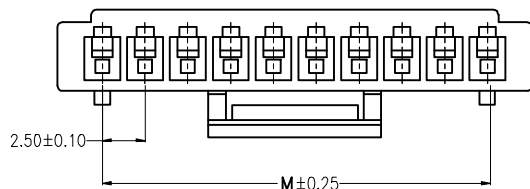




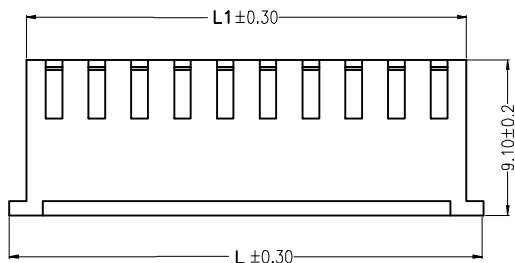

Specifications
 Current Rating: 3Amp
 Voltage Rating: 250V AC DC
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 1000VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -25°C to +85°C
 Materials
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.
 Mating with: GRG126-T2

No. of Pins/Row	Dimension Information		
	M	L1	L
02	2.50	5.75	7.50
03	5.00	8.25	10.00
04	7.50	10.75	12.50
05	10.00	13.25	15.00
06	12.50	15.75	17.50
07	15.00	18.25	20.00
08	17.50	20.75	22.50
09	20.00	23.25	25.00
10	22.50	25.75	27.50
11	25.00	28.25	30.00
12	27.50	30.75	32.50
13	30.00	33.25	35.00
14	32.50	35.75	37.50
15	35.00	38.25	40.00
16	37.50	40.75	42.50
17	40.00	43.25	45.00

Ordering Information

GWG201 - XX A XX

No. of Pins/Row
02~17


Material/Color
P1=NY66/White



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ± 5.0°	X. ± 0.50
.X' ± 3.0°	.X ± 0.30
.XX' ± 2.0°	.XX ± 0.25
.XXX' ± 1.0°	.XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



GWG201-HA

PART NO.


GWG201-XX A P1

TITLE.


2.5mm pitch Housing

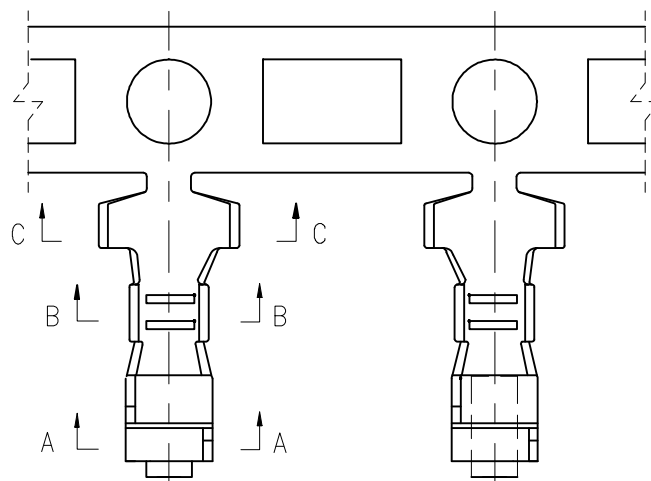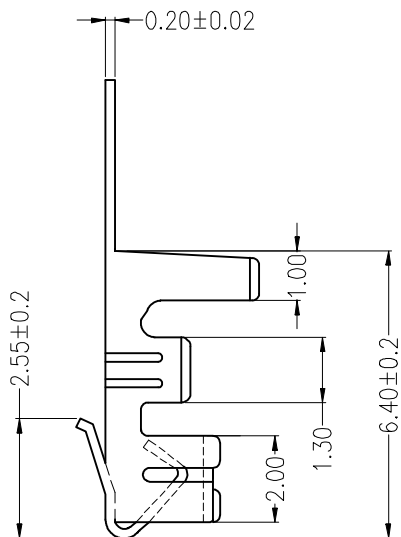


Specification:
 Contact Material: Phosphor bronze
 Wire range: AWG#22~#28
 Insulation O.D: 1.90mm(max)
 All materials must meet GREENCONN
 hazardous substances control standards
 Mating with: GWG201-HA



B-B



C-C



A-A

Ordering Information

GRG126 -02

XX

AB

Standard Plating
01=Tin

Materials
AB=Phosphor bronze



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
B	mm	1:1	1/1

3RD.ANG
PROJ.

GENERAL TOLERANCE

X.'±3.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.25
.XXX'±0.5'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRG126-T2

PART NO.

GRG126-02XXAB

TITLE.

2.50 端子