

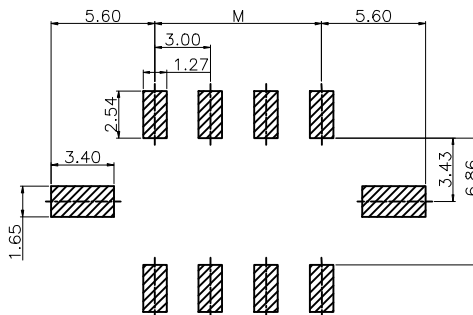
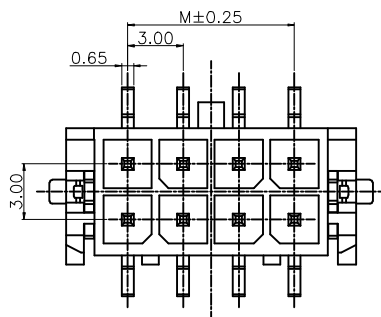
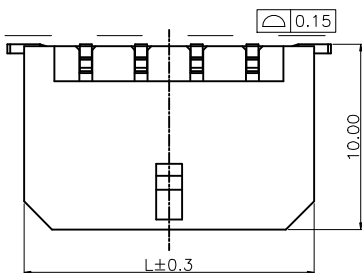


WITH COVER



PCB LAYOUT(Tolerance:±0.05)



Specifications

Current Rating:5.0A AC DC

Voltage Rating: 250V AC DC

Insulation Resistance:1000MΩ Min.

Dielectric Withstanding Voltage:1000V AC/minute

Contact Resistance:10mΩ Max.

Operating Temperature:-25°C to +85°C

Materials

Contact Material: Brass

Insulator Material:LCP,UL 94V-0

Solder Tabs: Brass

CAP:Stainless steel

All materials must meet Greenconn hazardous substances control standards.

PIN	M	L
2x1		6.65
2x2	3.00	9.65
2x3	6.00	12.65
2x4	9.00	15.65
2x5	12.00	18.65
2x6	15.00	21.65
2x7	18.00	24.65
2x8	21.00	27.65
2x9	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

Ordering Information

GWZC201 - XX XX A 005 C X B X

No. Of Pins Per Row 02~24 Standard Plating 22=Matte Tin Color 1=Black Standard Packing F=CAP+Tape&Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±5'	X.±0.50
.X'±2'	.X±0.30
.XX'±1'	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.


GWZC201-CA005CB

PART NO.







GWZC201-XXXXA005CXB

TITLE.

3.00mm PITCH
90° SMT WAFER



Specifications
 Current Rating: 5.0A AC DC
 Current Voltage: 250V AC DC
 Dielectric Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: $\geq 100M\Omega$
 Contact Resistance: $\leq 20m\Omega$
 Operating Temperature: $-40^{\circ}C$ to $+105^{\circ}C$
 Materials
 Insulation Material: PA66, UL94V-0
 Mating With:
 Terminal: GRZ1C3-T1
 Wafer: GWZC201-A005/GWZD201-A004
 All materials must meet Greenconn hazardous substances control standards.

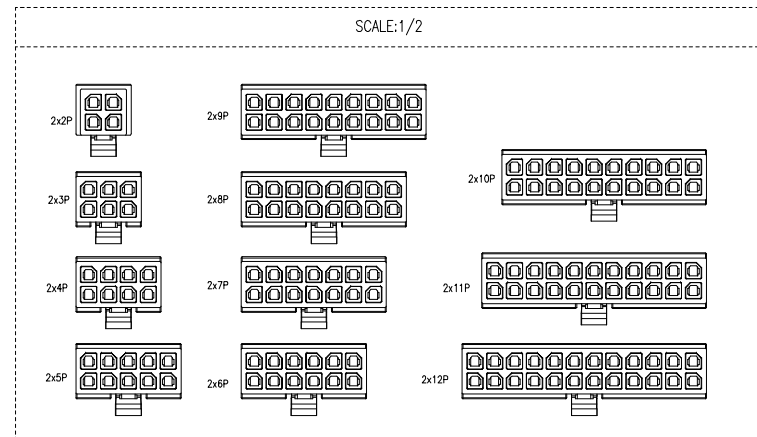

Ordering Information
 GHZ242 - XX A XX
 No. of Pins Per Row 02~12 Materials /Color M1=Nylon66/Black

No. of Pins/Row	Dimensions Information	
	L	M
02	6.90	3.00
03	9.90	6.00
04	12.90	9.00
05	15.90	12.00
06	18.90	15.00
07	21.90	18.00
08	24.90	21.00
09	27.90	24.00
10	30.90	27.00
11	33.90	30.00
12	36.90	33.00

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
01	mm	1:1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.'±3.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 GHZ242-HA
 PART NO.
 GHZ242-XXAXX

TITLE.
 3.00mm PITCH Housing

