




SECTION O-O


Specifications
 Voltage rating:300VAC
 Current rating:8 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 1.6KV
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+130°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 LCP
 All materials must meet GREENCONN
 hazardous substances control standards.

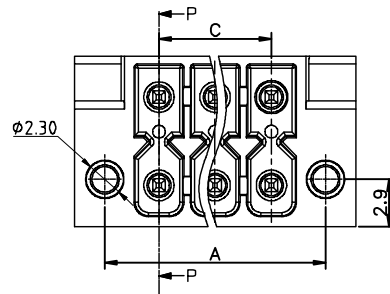

SECTION P-P

N=Number of contacts

Poles	Tol	Dim	Dim.L/A/B/C
2*2p-2*6p			±0.15
2*7p-2*12p			±0.25
2*13p-2*18p			±0.30
2*19p-2*24p			±0.35

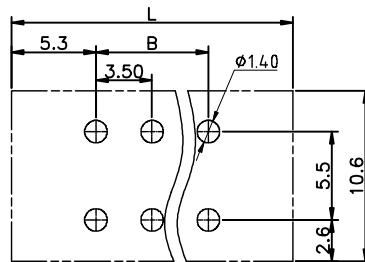

P.C.B Layout
Top view

Ordering Information

GXZA204 - XX XX A 002 C X B X
 No. Of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black Standard Packing A=Box

Order No.	L	A	B	C
02	17.50	13.75	3.50	3.50
03	21.00	17.25	7.00	7.00
04	24.50	20.75	10.50	10.50
05	28.00	24.25	14.00	14.00
06	31.50	27.75	17.50	17.50
07	35.00	31.25	21.00	21.00
08	38.50	34.75	24.50	24.50
09	42.00	38.25	28.00	28.00
10	45.50	41.75	31.50	31.50
11	49.00	45.25	35.00	35.00
12	52.50	48.75	38.50	38.50
13	56.00	52.25	42.00	42.00
14	59.50	55.75	45.50	45.50
15	63.00	59.25	49.00	49.00
16	66.50	62.75	52.50	52.50
17	70.00	66.25	56.00	56.00
18	73.50	69.75	59.50	59.50
19	77.00	73.25	63.00	63.00
20	80.50	76.75	66.50	66.50
21	84.00	80.25	70.00	70.00
22	87.50	83.75	73.50	73.50
23	91.00	87.25	77.00	77.00
24	94.50	90.75	80.50	80.50



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 GXZA204-CA002CB
 PART NO.
 GXZA204-XXXXA002CXBX

TITLE.

Pitch 3.5mm-series with
 flange vertical(THR type)