
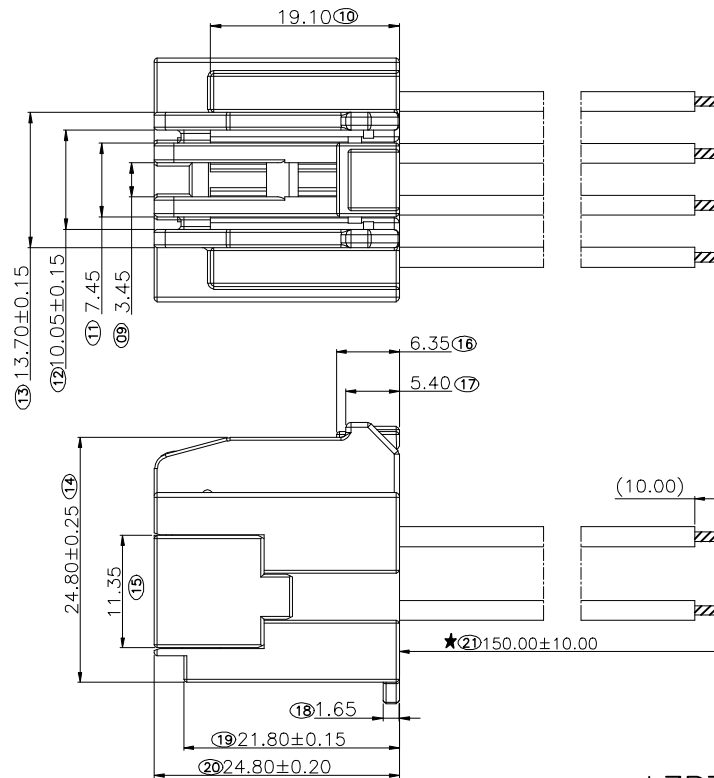


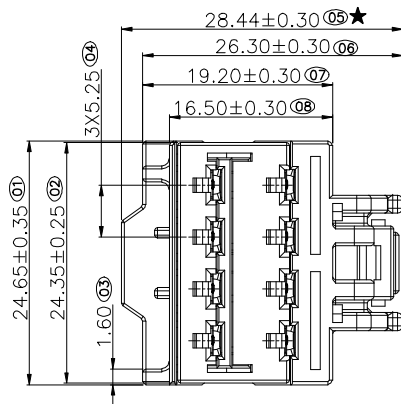

Specifications

Current Rating:3.0Amp.

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC.

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C.

Materials

Contact Material:Copper alloy

Nickel underplated all over 50~100u" Tin plated 40~100u".

Insulator Material: Temperature Thermoplastic, UL 94V-0 PBT or the equivalent material.

★ All materials must meet GREENCONN hazardous substances control standards.

★: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications.

★: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government.

Ordering Information

LZPZ2XX - XX 0150 A 18

No. of Pins per Row Standard Plating
04

P4=Nickel underplated
over all 50~100u".
tin plated 40~100u" over all

Cable Length
0150=150mm


Wire Spec
18=18 AWG



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 5:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

LZPZ204-CP40150A18

PART NO.

LZPZ204-P40150A18

TITLE.

5.25 PITCH FEMALE
CONNECTOR